



Commercial Products & Solutions

[SITE SEARCH](#)
[HOME](#)
[PRODUCTS](#)
[EDUCATION / RESOURCES](#)
[LIGHTING APPLICATIONS](#)

[Where to Buy](#) |
 [FAQs](#) |
 [Contact Us](#) |
 [EliteNet](#)

[Products](#) > 10742

10742 – F48T10/CW


GE T10 - Cold Temperature



- The T10 is designed to be used in cold temperature applications from 10 degrees F to 40 degrees F.

GENERAL CHARACTERISTICS

Lamp type	Linear Fluorescent - Straight Linear
Bulb	T10
Base	Recessed Double Contact (R17d)
Wattage	110
Rated Life	9000 hrs
Rated Life (instant start) @ Time	9000 h @ 3 h
LEED-EB MR Credit	1613 picograms Hg per mean lumen hour
Primary Application	Cold Temperature



[View Larger](#)

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	6200
Nominal Initial Lumens per Watt	56
Color Temperature	4100 K
Color Rendering Index (CRI)	60

ADDITIONAL RESOURCES


- [Catalogs](#)
- [Testimonials](#)
- [MSDS \(Material Safety Data Sheets\)](#)
- [Disposal Policies & Recycling Information](#)

DIMENSIONS

Maximum Overall Length (MOL)	48.0000 in (1219.2 mm)
Bulb Diameter (DIA)	1.250 in (31.7 mm)

GRAPHS & CHARTS

Lamp Mortality

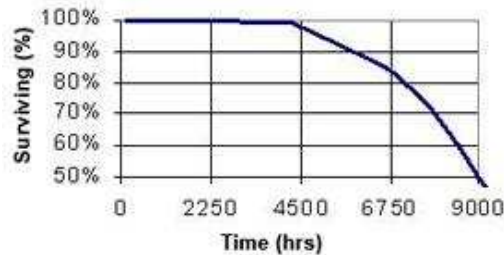

PRODUCT INFORMATION

Product Code	10742
Description	F48T10/CW
Standard Package	Case
Standard Package GTIN	10043168107423
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168107426


Temperature Curve

▲ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

NOTES

- Because Power Groove® and Very High Output lamps are most used in commercial applications, the life rating is based on 12 hrs. per start.

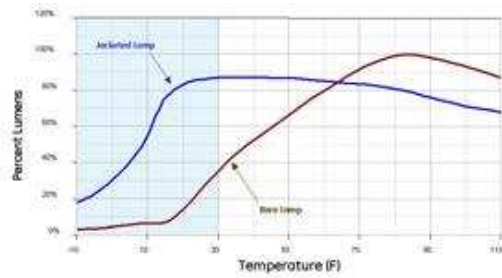

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2009