



Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 10204**10204 – F18T12/CW/HO**

GE Cool White T12

**GENERAL CHARACTERISTICS**

Lamp type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Wattage	30
Rated Life	9000 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29 °C (-20 °F)
Picograms of Mercury	1333 picograms

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	1000
Mean Lumens	750
Nominal Initial Lumens per Watt	33
Color Temperature	4100 K
Color Rendering Index (CRI)	60

ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**ELECTRICAL CHARACTERISTICS**


Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Nominal Length	18.000 in (457.2 mm)
Bulb Diameter (DIA)	1.500 in (38.1 mm)


PRODUCT INFORMATION

Product Code	10204
Description	F18T12/CW/HO
Standard Package	Case
Standard Package GTIN	10043168102046
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168102049

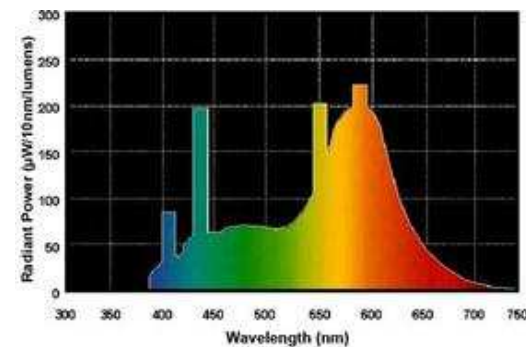GRAPHS & CHARTS**Spectral Power Distribution****Lamp Mortality**

▲ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

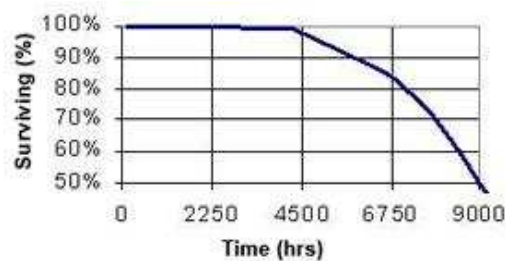

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2008