



Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 33707**33707 – F30T12/CW/HO**

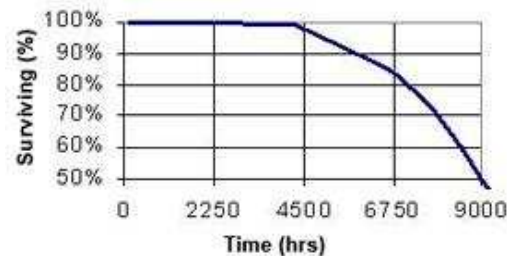
GE Cool White T12

**GENERAL CHARACTERISTICS**

Lamp type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Wattage	40
Voltage	48
Rated Life	9000 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29 °C (-20 °F)
Picograms of Mercury	3419 picograms

[View Larger](#)**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	2250
Mean Lumens	1950
Nominal Initial Lumens per Watt	56
Color Temperature	4100 K
Color Rendering Index (CRI)	60

GRAPHS & CHARTS**Lamp Mortality****ELECTRICAL CHARACTERISTICS**

Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	27.9100 in (708.9 mm)
Minimum Overall Length	27.7200 in (704.0 mm)
Nominal Length	30.000 in (762 mm)
Bulb Diameter (DIA)	1.500 in (38.1 mm)
Bulb Diameter (DIA) (MIN)	1.410 in (35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in (40.3 mm)

PRODUCT INFORMATION

Product Code	33707
Description	F30T12/CW/HO
Standard Package	Case
Standard Package GTIN	10043168337073

Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168337076

▲ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2008