




Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 47760**47760 – MVR175/U**


GE Multi-Vapor® Quartz Metal Halide ED28

**GENERAL CHARACTERISTICS**


Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED28
Base	Mogul Screw (E39)
Bulb Finish	Clear
Wattage	175
Rated Life (Hor)	6000 hrs
Rated Life (Vert)	10000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Enclosed fixtures only
LEED-EB MR Credit	293 picograms Hg per mean lumen hour




Bulb



Base

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (Hor)	11700
Initial Lumens (Vert)	13600
Mean Lumens (Hor)	7400
Mean Lumens (Vert)	8800
Nominal Initial Lumens per Watt	66
Color Temperature	4000 K
Color Rendering Index (CRI)	65
Effective Arc Length	1

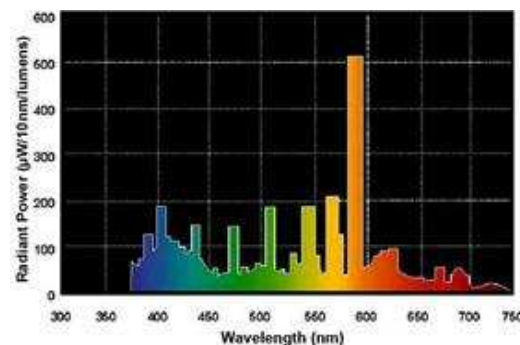ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution****ELECTRICAL CHARACTERISTICS**

Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast) (MIN)	540 V
Open Circuit Voltage (RMS lag ballast) (MIN)	382 V
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS

Maximum Overall Length	8 1/4
------------------------	-------

(MOL)

Nominal Length	8 1/4
Bulb Diameter (DIA)	3 1/2
Light Center Length (LCL)	5

PRODUCT INFORMATION

Product Code	47760
Description	MVR175/U
ANSI Code	M57
Standard Package	Case
Standard Package GTIN	10043168477601
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168477604

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
86563	1110245SCTC000I	1	90.0	1.0
86741	GEM175MLTAC3-5	1	90.0	1.0

⚠ CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information:
<http://www.fda.gov/cdrh/radhealth/products/urburns.html>

[See list of cautions & warnings.](#)

[Return To Top](#)