



GE Consumer & Industrial
Lighting

Commercial Products & Solutions

[SITE SEARCH](#)

[HOME](#)

[PRODUCTS](#)

[EDUCATION / RESOURCES](#)

[LIGHTING APPLICATIONS](#)

[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)

27502 – MVR320/C/VBUHOPA

GE Multi-Vapor® PulseArc® Quartz Metal Halide ED28



GENERAL CHARACTERISTICS

Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED28
Base	Mogul Screw (E39)
Bulb Finish	Coated
Wattage	320
Rated Life	20000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Enclosed fixtures only

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	30000
Mean Lumens	16500
Nominal Initial Lumens per Watt	93
Color Temperature	3700 K
Color Rendering Index (CRI)	70

ELECTRICAL CHARACTERISTICS


Burn Position	Vertical base up $\pm 15^\circ$
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS

Maximum Overall Length (MOL)	8.2500 in (209.5 mm)
Nominal Length	8.250 in (209.5 mm)
Bulb Diameter (DIA)	3.500 in (88.9 mm)
Light Center Length (LCL)	5.000 in (127 mm)



PRODUCT INFORMATION

Product Code	27502
Description	MVR320/C/VBUHOPA
ANSI Code	M132/M154



Bulb

Base



[View Larger](#)

ADDITIONAL RESOURCES

Catalogs

Testimonials

Brochures

Product Brochures

- [Metal Halide Lamps](#)
- [HID Lamps](#)
- [PulseArc MV](#)
- [Industrial Lighting](#)

Application/Segment Brochures


- [Retail Lighting](#)
- [Contractor Lighting](#)

MSDS (Material Safety Data Sheets)

Disposal Policies & Recycling Information

GRAPHS & CHARTS

Spectral Power Distribution

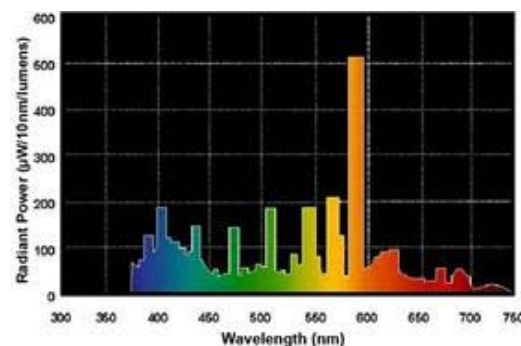

Standard Package	Case
Standard Package GTIN	10043168275023
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168275026

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
29377	GE-MH-250-400-MA	1	99.0	1.0

 CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radh1th/urburns.html>

[See list of cautions & warnings.](#)

NOTES

- When operated on a 120 hrs. cycle (minimum), lamp life rating may be extended by up to 50% based on engineering estimates.

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright General Electric Company 1997-2007