


19024 – 120 PAR56 MFL

GE PAR56 - Medium Flood

GENERAL CHARACTERISTICS

Lamp type	Sealed Beam - PAR
Bulb	PAR56
Base	Screw Terminals
Filament	C-6
Product Technology	Incandescent
Wattage	120
Voltage	12
Rated Life	2000 hrs
Primary Application	Medium Flood

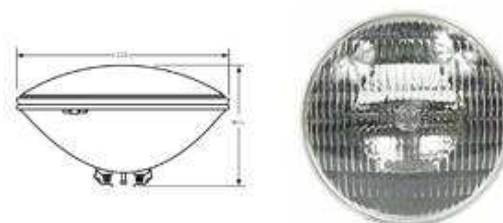

Bulb



Base



Filament

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	1050
Beam Spread - Horizontal	29° - 10 %, 18° - 50 %
Beam Spread - Vertical	15° - 10 %, 9° - 50 %
Center Beam Candpower (CBCP)	19000
Color Temperature	2750 K
Nominal Initial Lumens per Watt	8

ADDITIONAL RESOURCES[Catalogs](#)[IES/Photometric Download](#)[Disposal Policies & Recycling Information](#)**DIMENSIONS**

Maximum Overall Length (MOL)	4.5000 in (114.3 mm)
Bulb Diameter (DIA)	7.000 in (177.8 mm)

PRODUCT INFORMATION

Product Code	19024
Description	120 PAR56 MFL
Standard Package	Case
Standard Package GTIN	10043168190241
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168190244

▲ CAUTIONS & WARNINGS[See list of cautions & warnings.](#)**NOTES**

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).