


13228 – FFR-Q1000PAR64/5

GE Quartzline® Showbiz® PAR64 - Stage & Studio; Medium Flood

**GENERAL CHARACTERISTICS**


Lamp type	Sealed Beam - PAR
Bulb	PAR64
Base	Extended Mogul End Prong (GX16d EXT)
Filament	C-7A
Product Technology	Halogen
Wattage	1000
Voltage	120
Voltage (MIN)	1000
Rated Life	800 hrs
Rated Life (Vert)	800 hrs
Primary Application	Stage & Studio; Medium Flood

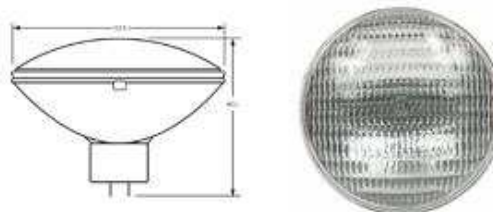

Bulb



Base



Filament

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	125000
Initial Lumens (Hor)	125000
Initial Lumens (Vert)	125000
Beam Spread - Horizontal	44° - 10 %, 28° - 50 %
Beam Spread - Vertical	12° - 50 %, 21° - 10 %
Center Beam Candlepower (CBCP)	125000
Color Temperature	3200 K
Color Rendering Index (CRI)	63
Max. Beam Candlepower (MBCP) (MAX)	125000
Nominal Initial Lumens per Watt	125

ADDITIONAL RESOURCES[Catalogs](#)[IES/Photometric Download](#)[Disposal Policies & Recycling Information](#)**DIMENSIONS**

Maximum Overall Length (MOL)	6.0000 in (152.4 mm)
Bulb Diameter (DIA)	8.000 in (203.2 mm)

PRODUCT INFORMATION

Product Code	13228
Description	FFR-Q1000PAR64/5
ANSI Code	FFR
Standard Package	Case
Standard Package GTIN	10043168132289
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168132282

⚠ CAUTIONS & WARNINGS[See list of cautions & warnings.](#)

