



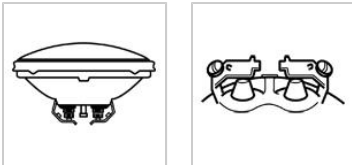

GE  
Lighting

### 12720 - H7557

GE PAR36 - Emergency Building Light; Emergency Building

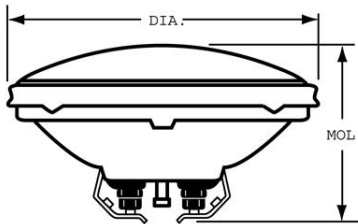

#### CAUTIONS & WARNINGS

##### Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Do not use lamp if outer glass is scratched or broken.
  - Dispose of lamp in a closed container.

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life	50.0 hrs
Primary Application	Emergency Building Light; Emergency Building

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	30.0 - 10.0 °
Beam Spread - Vertical	20.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	850.0

#### ELECTRICAL CHARACTERISTICS

Wattage	12.0
Voltage	12.0

#### DIMENSIONS

Maximum Overall Length (MOL)	2.7500 in(69.8 mm)
Bulb Diameter (DIA)	4.500 in(114.3 mm)

#### PRODUCT INFORMATION

Product Code	12720
Description	H7557
ANSI Code	H7557
Standard Package	Case
Standard Package GTIN	10043168127209
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168127202