




Commercial Products &amp; Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 10364**10364 – MXR50/C/U/MED**

GE Multi-Vapor® PulseArc® Quartz Metal Halide BD17

[Print this Page](#)[Convert to PDF](#)**GENERAL CHARACTERISTICS**

Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	BD17
Base	Medium Screw (E26)
Bulb Finish	Coated
Wattage	50
Rated Life	10000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Enclosed fixtures only
Base Temperature (MAX)	190 °C (374 °F)
Bulb Temperature (MAX)	400 °C (752 °F)
LEED-EB MR Credit	274 picograms Hg per mean lumen hour



Bulb



Base

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	3000
Mean Lumens	2000
Nominal Initial Lumens per Watt	60
Color Temperature	3400 K
Color Rendering Index (CRI)	65

**ELECTRICAL CHARACTERISTICS**


Burn Position	Universal burning position
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

**DIMENSIONS**

Maximum Overall Length (MOL)	5.4300
Bulb Diameter (DIA)	2 1/8
Light Center Length (LCL)	3.430

**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)**Brochures**

- Product Brochures
  - [HID Lamps](#)
- Application/Segment Brochures
  - [Retail Lighting](#)
  - [Contractor Lighting](#)

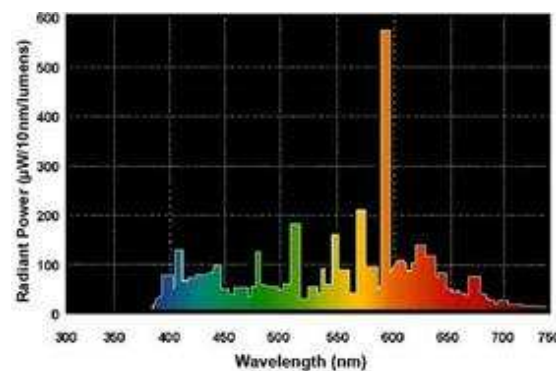[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution**

**PRODUCT INFORMATION**

Product Code	10364
Description	MXR50/C/U/MED
ANSI Code	M110
Standard Package	Case
Standard Package GTIN	10043168103647
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168103640

**COMPATIBLE GE BALLASTS**

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
<a href="#">86824</a>	GEM50MLTLC3D-5	1	0.9	1.0

**⚠ CAUTIONS & WARNINGS**

**R-** WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map  
 Products for Your Home | Press Room | Corporate | Careers | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright 2010 General Electric Company