



Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 15115**15115 – F48T12/SPX35/HO**

GE T12

High Color Rendering

GENERAL CHARACTERISTICS

Lamp type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Wattage	60
Voltage	78
Rated Life	12000 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29 °C (-20 °F)
LEED-EB MR Credit	1276 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	4350
Mean Lumens	3920
Nominal Initial Lumens per Watt	72
Color Temperature	3500 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS


Open Circuit Voltage (rapid start) Min @ Temperature	256 V @ 10 °C 310 V @ -29 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	45.9100 in (1166.1 mm)
Minimum Overall Length	45.7200 in (1161.2 mm)
Nominal Length	48.000 in (1219.2 mm)
Bulb Diameter (DIA)	1.500 in (38.1 mm)
Bulb Diameter (DIA) (MIN)	1.410 in (35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in (40.3 mm)
End of Base Pin to End of Opposite Pin End (C)	45.720 in (1161.2 mm)

PRODUCT INFORMATION

Bulb



Base

[View Larger](#)



Print this Page

Convert to PDF


ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)**Brochures**

Application/Segment Brochures

- [Retail Lighting](#)
- [Office Lighting](#)
- [Healthcare Lighting](#)
- [Contractor Lighting](#)

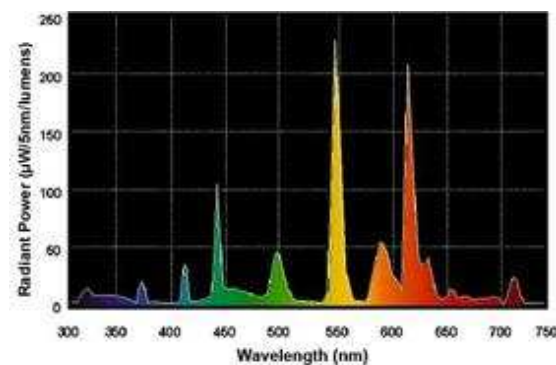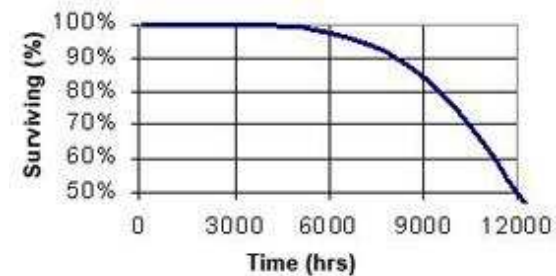[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution****Lamp Mortality****Lumen Maintenance**

Product Code	15115
Description	F48T12/SPX35/HO
ANSI Code	1013-1
Standard Package	Case
Standard Package GTIN	10043168151150
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168151153

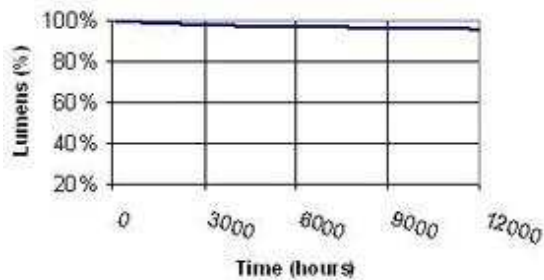

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
75671	GE296HO-MV-N	2	0.99	0.9
72109	GE296HO-MV-N-DIY	2	0.99	0.9

CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Careers | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright 2010 General Electric Company