



Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 21054**21054 – ARC150T/U/840G12**

GE Multi-Vapor® Arcstream® Quartz Metal Halide T6 - Stage & Studio; Retail Display

• Compact size, white light, excellent color Precise optical control delivers a concentrated beam of light right where it's needed

RoHs Compliant

GENERAL CHARACTERISTICS

Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	T6
Base	Bi-Pin (G12)
Bulb Finish	Clear
Wattage	150
Rated Life	6000 hrs
Bulb Material	Quartz
Lamp Enclosure Type (LET)	Enclosed fixtures only
LEED-EB MR Credit	469 picograms Hg per mean lumen hour
Primary Application	Stage & Studio; Retail Display

PHOTOMETRIC CHARACTERISTICS


Initial Lumens	11500
Mean Lumens	10500
Nominal Initial Lumens per Watt	76
Color Temperature	4000 K
Color Rendering Index (CRI)	80

ELECTRICAL CHARACTERISTICS


Burn Position	Universal burning position
Warm Up Time to 90%	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS



Maximum Overall Length (MOL)	3
Bulb Diameter (DIA)	3/4
Light Center Length (LCL)	2 1/4



Bulb



Base

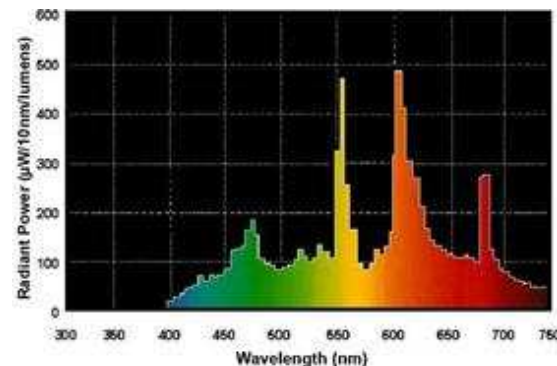[View Larger](#)[Print this Page](#)[Convert to PDF](#)**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution**

PRODUCT INFORMATION

Product Code	21054
Description	ARC150T/U/840G12
ANSI Code	M81
Standard Package	Case
Standard Package GTIN	10043168210543
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168210546

▲ CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

[See list of cautions & warnings.](#)

[Return To Top](#)

[Home](#) | [Products](#) | [EliteNet](#) | [Education/Resources](#) | [Lighting Applications](#) | [Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [Site Map](#)
[Products for Your Home](#) | [Press Room](#) | [Corporate](#) | [Careers](#) | [Investor Information](#) | [Privacy Policy](#) | [Accessibility Statement](#) | [Terms of Use](#)

Copyright 2010 General Electric Company