





GE  
Lighting

## 22127 - CMH100/U/830/MED

GE ConstantColor® PulseArc® CMH® Ceramic Metal Halide BD17

a product of  
**ecomagination**

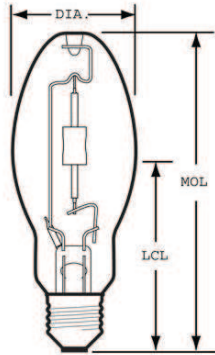

### CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

#### Caution

- Lamp may shatter and cause injury if broken
  - Dispose of lamp in a closed container.
  - Do not use excessive force when installing lamp.
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Electric Shock
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.
- Risk of Burn
  - Allow lamp to cool before handling.
  - Do not turn on lamp until fully installed.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Do not exceed rated voltage.
  - Do not turn on lamp until fully installed.
  - Do not use beyond rated life.
  - Do not use lamp if outer glass is scratched or broken.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
  - Use in enclosed fixture rated for this product.
  - Use only properly rated ballast.

### NOTES

- Rated life based on 11 hours per start

### GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Ceramic Metal Halide BD17
Bulb	BD17
Base	Medium Screw (E26)
Bulb Finish	Clear
Wattage	100
Rated Life	15000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Enclosed fixtures only
LEED-EB MR Credit	74 picograms Hg per mean lumen hour

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	9200 /9200
Mean Lumens	6400 /6600
Nominal Initial Lumens per Watt	92
Color Temperature	3000 K
Color Rendering Index (CRI)	83
Effective Arc Length	0.3125 cm

### ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast)	332 V
Open Circuit Voltage (RMS lag ballast)	235 V
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90%	15 min
Hot Restart Time to 90% (MAX)	15 min

### DIMENSIONS

Maximum Overall Length (MOL)	5.43 cm
Nominal Length	5.43 cm
Bulb Diameter (DIA)	2.125 cm
Bulb Diameter (DIA) (MAX)	2.125 cm
Light Center Length (LCL)	3.37 cm

### PRODUCT INFORMATION

Product Code	22127
Description	CMH100/U/830/MED
ANSI Code	M140/M90
Standard Package	Case
Standard Package GTIN	10043168221273
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168221276