



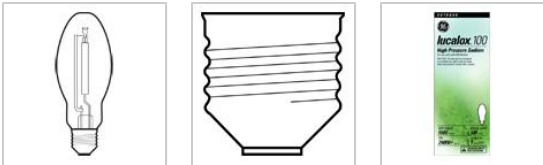

GE
Lighting

26423 - LU100/MED/CP

GE Lucalox® High Pressure Sodium B17

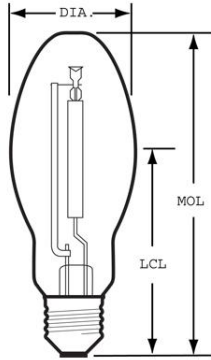

CAUTIONS & WARNINGS

Caution


-
-

Warning

-
-
-
-

GRAPHS & CHARTS

Spectral Power Distribution

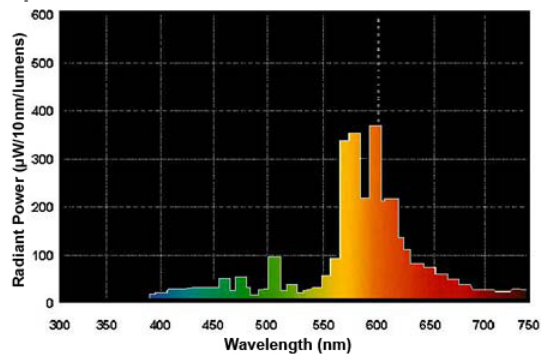

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	B17
Base	Medium Screw (E26)
Bulb Finish	Clear
Rated Life	24000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	77 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Motion-Sensing & Security

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	9500
Mean Lumens	8550
Nominal Initial Lumens per Watt	95
Color Temperature	2000 K
Color Rendering Index (CRI)	22
Effective Arc Length	1.4 in

ELECTRICAL CHARACTERISTICS

Wattage	100
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast)	110 V
Warm Up Time to 90% (MIN)	3 min
Warm Up Time to 90% (MAX)	4 min
Hot Restart Time to 90% (MAX)	0.67 min

DIMENSIONS

Maximum Overall Length (MOL)	5.5000 in(139.7 mm)
Nominal Length	5.500 in(139.7 mm)
Bulb Diameter (DIA)	2.125 in(54.0 mm)
Bulb Diameter (DIA) (MAX)	
Light Center Length (LCL)	3.430 in(87.1 mm)

PRODUCT INFORMATION

Product Code	26423
Description	LU100/MED/CP
ANSI Code	S54
Standard Package	Case
Standard Package GTIN	30043168264236
Standard Package Quantity	4
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	4
UPC	043168264235