




GE
Lighting

14748 - 75PAR/H/FL25-6PK

GE Floodlight PAR38

- Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.
- Uses Halogen technology for a brighter, crisper light
- Lasts 25% longer than regular bulbs*
- GE's Floodlights cast a wider beam that adds drama to driveways and yards.

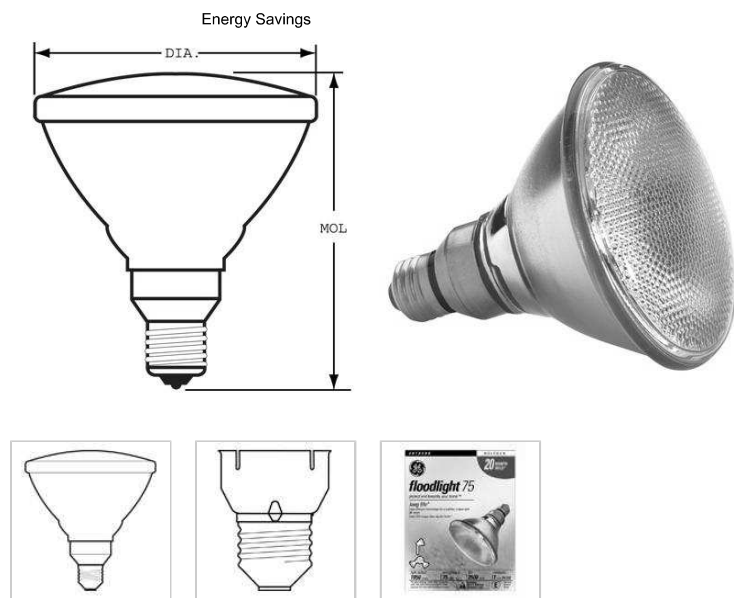

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Pressurized lamp—unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Burn
 - Allow lamp to cool before handling.
- Risk of Fire
 - Keep combustible materials away from lamp.

*20 month life based on rated life at 4 hours/day.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Rated Life	2500.0 hrs
Primary Application	Yard Stake

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1050.0
Center Beam Candlepower (CBCP)	4000.0
Color Temperature	2850.0 K
Nominal Initial Lumens per Watt	14

ELECTRICAL CHARACTERISTICS

Wattage	75.0
Voltage	120.0

DIMENSIONS

Maximum Overall Length (MOL)	5.3130 in(135.0 mm)
Bulb Diameter (DIA)	4.750 in(120.6 mm)

PRODUCT INFORMATION

Product Code	14748
Description	75PAR/H/FL25-6PK
Standard Package	Case
Standard Package GTIN	10043168147481
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168147484