





GE  
Lighting

## 11131 - 75PAR30L/H/FL25

### GE PAR30L

- Standard Halogen - Crisp, white light

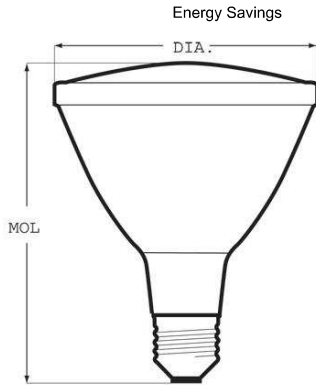

#### CAUTIONS & WARNINGS

##### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

##### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Burn
  - Allow lamp to cool before handling.
- Risk of Fire
  - Keep combustible materials away from lamp.
- Pressurized lamp—unexpected rupture may cause injury, fire, or property damage
  - Do not use lamp if outer glass is scratched or broken.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.

#### GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR30L
Base	Medium NP
Filament	CC-8
Rated Life	3000.0 hrs

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	940.0 /751.0
Center Beam Candlepower (CBCP)	3800.0
Color Temperature	2830.0 K
Nominal Initial Lumens per Watt	12 /11

#### ELECTRICAL CHARACTERISTICS

Wattage	75.0
Voltage	130.0
Burn Position	Universal burning position

#### DIMENSIONS

Maximum Overall Length (MOL)	4.7500 in(120.6 mm)
Bulb Diameter (DIA)	3.813 in(96.9 mm)

#### PRODUCT INFORMATION

Product Code	11131
Description	75PAR30L/H/FL25
Standard Package	Case
Standard Package GTIN	10043168111314
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168111317