




GE  
Lighting

## 17451 - 90PAR/H/FL25-6PK

### GE Floodlight PAR38

- Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.
- Uses Halogen technology for a brighter, crisper light
- Lasts 25% longer than regular bulbs\*
- GE's Floodlights cast a wider beam that adds drama to driveways and yards.

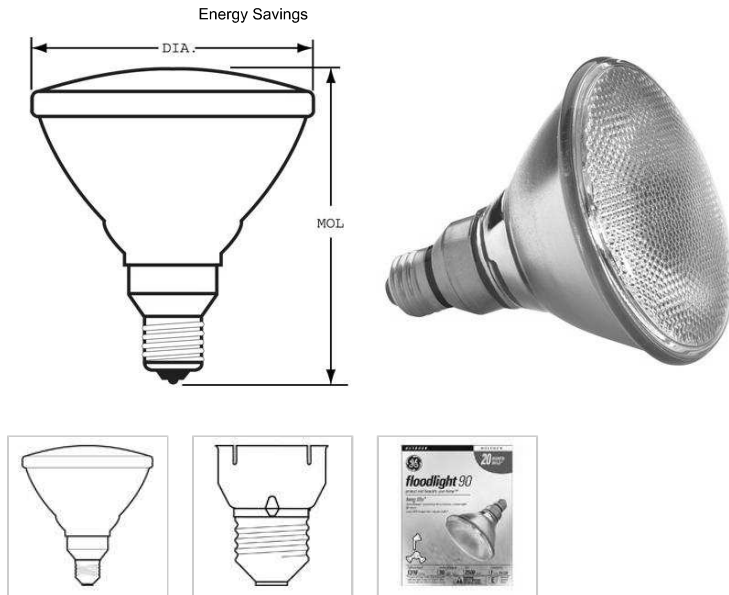

### GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Rated Life	2500.0 hrs
Primary Application	Yard Stake

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1310.0
Center Beam Candlepower (CBCP)	4700.0
Color Temperature	2900.0 K
Nominal Initial Lumens per Watt	14

### ELECTRICAL CHARACTERISTICS

Wattage	90.0
Voltage	120.0

### DIMENSIONS

Maximum Overall Length (MOL)	5.3130 in(135.0 mm)
Bulb Diameter (DIA)	4.750 in(120.6 mm)

### PRODUCT INFORMATION

Product Code	17451
Description	90PAR/H/FL25-6PK
Standard Package	Case
Standard Package GTIN	00043168174510
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168970051

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Risk of Burn
  - Allow lamp to cool before handling.
- Risk of Fire
  - Keep combustible materials away from lamp.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Pressurized lamp—unexpected rupture may cause injury, fire, or property damage
  - Do not use lamp if outer glass is scratched or broken.

\*20 month life based on rated life at 4 hours/day. Provides nearly the same light output (1310 lumens vs. 1500 lumens) as 100 watt, 2000 hr halogen bulb.