







GE  
Lighting

### 39406 - 500PAR64/NSP

GE PAR64 - Narrow Spot

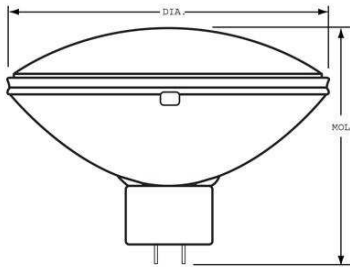

#### CAUTIONS & WARNINGS

##### Warning

- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.

#### NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR64
Base	Extended Mogul End Prong (GX16d EXT)
Filament	CC-13
Rated Life	2000.0 hrs
Primary Application	Narrow Spot

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	19.0 - 10.0 °/12.0 - 50.0 °
Beam Spread - Vertical	14.0 - 10.0 °/7.0 - 50.0 °
Center Beam Candlepower (CBCP)	110000.0
Color Temperature	2800.0 K
Max. Beam Candlepower (MBCP) (MAX)	110000.0

#### ELECTRICAL CHARACTERISTICS

Wattage	500.0
Voltage	120.0

#### DIMENSIONS

Maximum Overall Length (MOL)	6.0000 in(152.4 mm)
Bulb Diameter (DIA)	8.000 in(203.2 mm)

#### PRODUCT INFORMATION

Product Code	39406
Description	500PAR64/NSP
Standard Package	Case
Standard Package GTIN	10043168394069
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168394062