





GE  
Lighting

**39412 - 500PAR64/WFL**  
GE PAR64 - Wide Flood

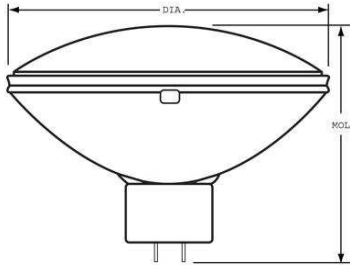

**CAUTIONS & WARNINGS**

**Warning**

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.

**NOTES**

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

**GENERAL CHARACTERISTICS**

Lamp Type	Sealed Beam - PAR
Bulb	PAR64
Base	Extended Mogul End Prong (GX16d EXT)
Filament	CC-13
Rated Life	2000.0 hrs
Primary Application	Wide Flood

**PHOTOMETRIC CHARACTERISTICS**

Beam Spread - Horizontal	55.0 - 10.0 °/42.0 - 50.0 °
Beam Spread - Vertical	20.0 - 50.0 °/32.0 - 10.0 °
Center Beam Candlepower (CBCP)	13000.0
Color Temperature	2800.0 K
Max. Beam Candlepower (MBCP) (MAX)	13000.0

**ELECTRICAL CHARACTERISTICS**

Wattage	500.0
Voltage	120.0

**DIMENSIONS**

Maximum Overall Length (MOL)	6.0 cm
Bulb Diameter (DIA)	8.0 cm

**PRODUCT INFORMATION**

Product Code	39412
Description	500PAR64/WFL
Standard Package	Case
Standard Package GTIN	10043168394120
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168394123