





GE
Lighting

43499 - Q1000PAR64/WFL

GE Quartzline® PAR64 - Wide Flood

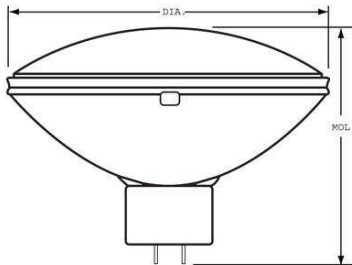

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Pressurized lamp—unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR64
Base	Extended Mogul End Prong (GX16d EXT)
Filament	CC-6
Rated Life (TYP)	4000.0 h
Rated Life	4000.0 hrs
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (TYP)	0.0
Initial Lumens	0.0
Initial Lumens (AVG)	0.0
Beam Spread - Horizontal	72.0 - 10.0 °/48.0 - 50.0 °
Beam Spread - Vertical	24.0 - 50.0 °/45.0 - 10.0 °
Center Beam Candlepower (CBCP)	33000.0
Color Temperature	3000.0 K
Max. Beam Candlepower (MBCP) (MAX)	33000.0
Nominal Initial Lumens per Watt	0

ELECTRICAL CHARACTERISTICS

Wattage	1000.0
Voltage (MIN)	1000.0
Voltage	120.0

DIMENSIONS

Maximum Overall Length (MOL)	6.0 cm
Bulb Diameter (DIA)	8.0 cm

PRODUCT INFORMATION

Product Code	43499
Description	Q1000PAR64/WFL
Standard Package	Case
Standard Package GTIN	10043168434994
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168434997