

LED Non-Dimmable PAR38

50,000 Hours average rated life, 120Volts

Applications:


Ideal for high output PAR38 flood and spot applications.

- + Track Lights
- + Recessed Downlights
- + Display Lights



Features and Benefits

- **Non-Dimming**
- **Energy Efficient:** Up to 80% less energy than halogen and CMH alternatives.
- **Exceeds all industry performance requirements.**
- **Long life:** Designed for 50,000 hours (lasts at least 15 times longer than alternative) 25,000 hour rated life for ENERGY STAR qualified lamps.
- **Very Durable:** Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design. Shatter resistant.
- **Very low heat generation** – excellent for sensitive display lighting.
- Excellent Color consistency and high color rendering (CRI).
- Available in black and white housings

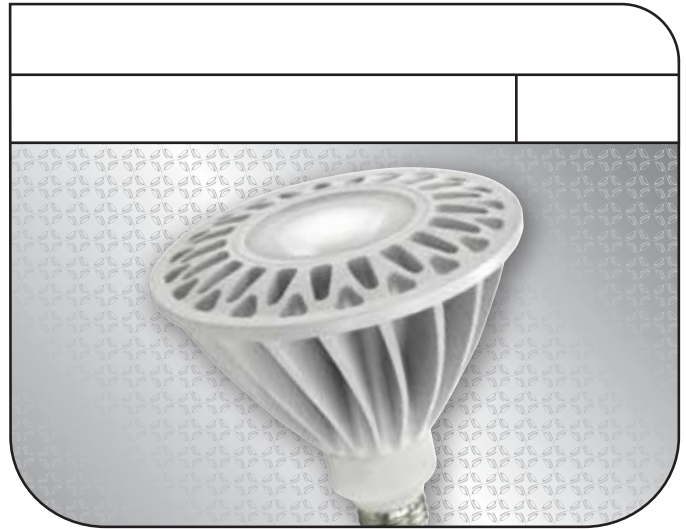

Specifications



* For black housing option, add suffix "B" to the end of the item number

| Warranties and Certifications: | Item # | Description | Voltage | Wattage | Incandescent Watt Equivalent | Lumens | LPW | CBCP | Beam Angle | CCT | CRI | |
|--------------------------------|--|--|---------|---------|------------------------------|--------|-------|-------|------------|-------|-----|--|
| 5 YEAR WARRANTY | 23W PAR38 2700K | | | | | | | | | | | |
| | LED23E26P3827KSPND | LED Non-Dimming 23W PAR38 Spot – 2700K | 120 | 23 | 150W | 1550 | 67.4 | 11517 | 15 | 2700K | 82 | |
| | LED23E26P3827KNFLND | LED Non-Dimming 23W PAR38 Narrow Flood – 2700K | 120 | 23 | 150W | 1550 | 67.4 | 7198 | 25 | 2700K | 82 | |
| | LED23E26P3827KFLND | LED Non-Dimming 23W PAR38 Flood – 2700K | 120 | 23 | 150W | 1550 | 67.4 | 2716 | 40 | 2700K | 82 | |
| | 23W PAR38 3000K | | | | | | | | | | | |
| | LED23E26P3830KSPND | LED Non-Dimming 23W PAR38 Spot – 3000K | 120 | 23 | 150W | 1600 | 69.6 | 12518 | 15 | 3000K | 82 | |
| | LED23E26P3830KNFLND | LED Non-Dimming 23W PAR38 Narrow Flood – 3000K | 120 | 23 | 150W | 1600 | 69.6 | 7824 | 25 | 3000K | 82 | |
| | LED23E26P3830KFLND | LED Non-Dimming 23W PAR38 Flood – 3000K | 120 | 23 | 150W | 1600 | 69.6 | 2952 | 40 | 3000K | 82 | |
| | 23W PAR38 4100K | | | | | | | | | | | |
| LED23E26P3841KSPND | LED Non-Dimming 23W PAR38 Spot – 4100K | 120 | 23 | 150W | 1700 | 73.9 | 13269 | 15 | 4100K | 82 | | |
| LED23E26P3841KNFLND | LED Non-Dimming 23W PAR38 Narrow Flood – 4100K | 120 | 23 | 150W | 1700 | 73.9 | 8293 | 25 | 4100K | 82 | | |
| LED23E26P3841KFLND | LED Non-Dimming 23W PAR38 Flood – 4100K | 120 | 23 | 150W | 1700 | 73.9 | 3130 | 40 | 4100K | 82 | | |

Specification Notes:

CBCP was estimated based on known photometry. Consult www.tcp.com for most current photometry and LM79 data.