

PRELIMINARY



Soraa Internal Report: IES LM79-08

Test results reported for:

Customer Reference P/N: **SP30L-18-25D-927-03**
Manufacturing P/N: SP30L-18-25D-927-03

Soraa PAR30L, E26/120V, 2700K, 95CRI, 18.5W, 25degree

Relevant Standards

IES LM-79

ANSI C78.377

IES PR-16

Soraa Lamp Lab

1.0 Description of test sample

Customer reference ID	SP30L-18-25D-927-03
Manufacturer reference ID	SP30L-18-25D-927-03
Lamp description	Vivid 2700K 90CRI 18.5W 25 degree
Rated voltage	AC 12V
Rated power	18.5W
Nominal CCT	2700K




2.0 Results - Sphere Measurements

Test conditions	
Orientation	Horizontal
Stabilization time (min)	50-55
Correction factor applied	Self absorption correction
Sphere geometry	65" Sphere
	95% coating reflectance
	2pi geometry
Ambient temperature (°C)	25±1


Instrument				
	Instrument	Manufacture	Model	
Photometric	Spectrometer	Instrument systems	CAS 140T	
	Integrating sphere	Labsphere	65"	
	Standard lamp	Labsphere	CSFS-1400 lamp	
Electrical instrument	Power supply for standard lamp	Labsphere	LPS-150-0268	
	Power supply for aux lamp	Labsphere	LPS-100-0833	
	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results				
	Photometric		Electrical	
Total lumen (lm)	955		Input voltage (V)	119.6
Luminous efficacy (lm/W)	52		Current (A)	0.156
Chromaticity coordinates	$u' = 0.2630$		Power (W)	18.5
	$v' = 0.5270$		pf	0.989
	$x = 0.4600$			
	$y = 0.4097$			
CCT (K)	2700			
CRI	96			
R9	93			
Duv				

Spectral power distribution

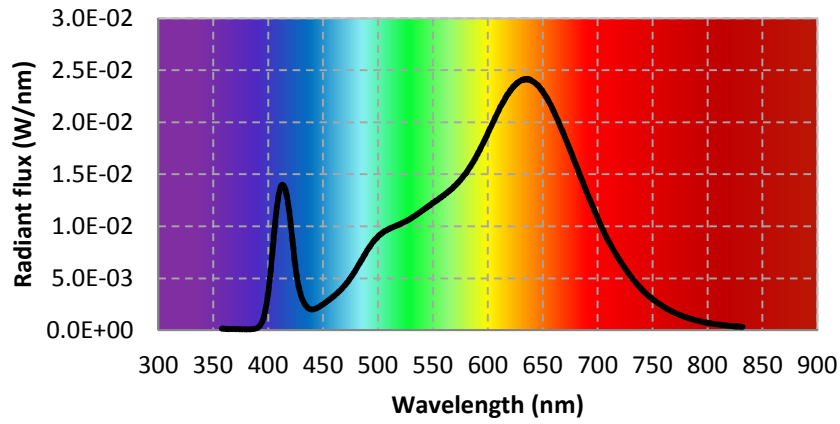


Chromaticity on CIE1931

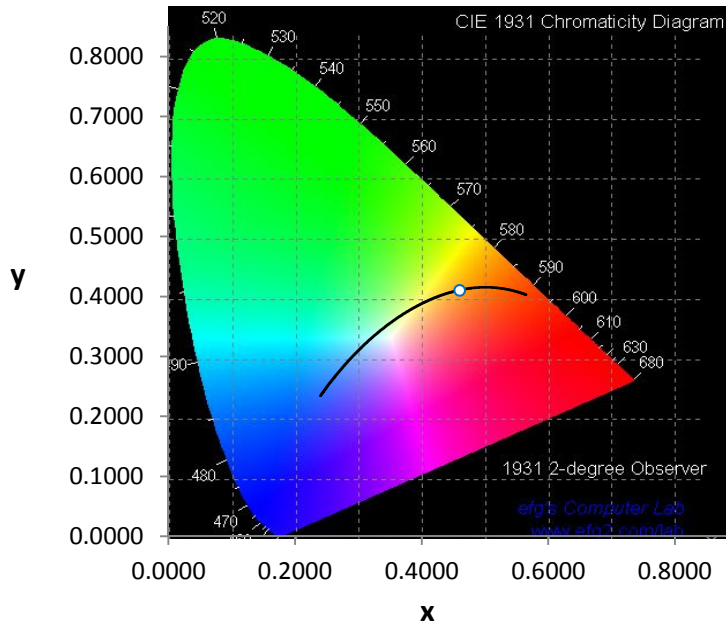

CRI

R1	96
R2	97
R3	98
R4	93
R5	94
R6	93
R7	98
R8	97
R9	93
R10	95
R11	89
R12	76
R13	96
R14	98
Ra	96

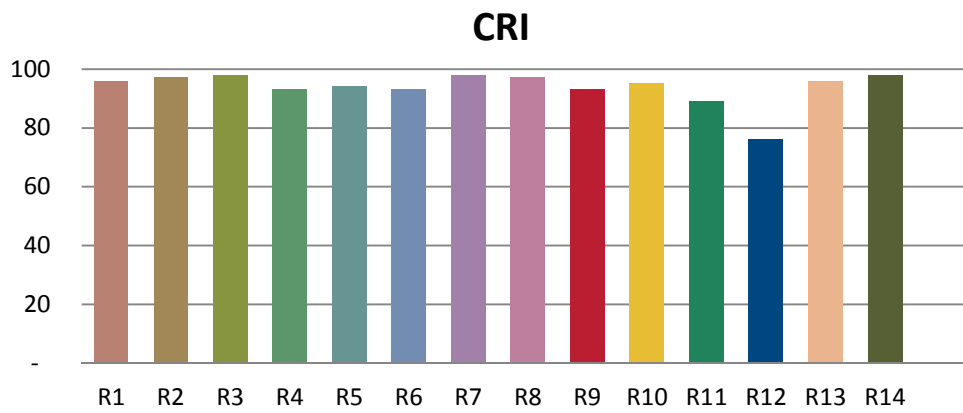

WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
380	1.01E-04	421	9.75E-03	462	3.49E-03	503	9.30E-03	544	1.18E-02
381	1.00E-04	422	8.80E-03	463	3.60E-03	504	9.36E-03	545	1.18E-02
382	1.04E-04	423	7.78E-03	464	3.68E-03	505	9.45E-03	546	1.19E-02
383	1.05E-04	424	6.78E-03	465	3.79E-03	506	9.53E-03	547	1.20E-02
384	1.03E-04	425	5.98E-03	466	3.88E-03	507	9.57E-03	548	1.21E-02
385	1.10E-04	426	5.25E-03	467	3.99E-03	508	9.64E-03	549	1.22E-02
386	1.20E-04	427	4.61E-03	468	4.11E-03	509	9.69E-03	550	1.23E-02
387	1.29E-04	428	4.12E-03	469	4.23E-03	510	9.74E-03	551	1.23E-02
388	1.43E-04	429	3.66E-03	470	4.36E-03	511	9.80E-03	552	1.24E-02
389	1.76E-04	430	3.31E-03	471	4.47E-03	512	9.84E-03	553	1.25E-02
390	2.16E-04	431	3.01E-03	472	4.61E-03	513	9.89E-03	554	1.25E-02
391	2.89E-04	432	2.78E-03	473	4.75E-03	514	9.92E-03	555	1.26E-02
392	3.93E-04	433	2.58E-03	474	4.90E-03	515	9.97E-03	556	1.27E-02
393	5.32E-04	434	2.41E-03	475	5.05E-03	516	1.00E-02	557	1.27E-02
394	7.12E-04	435	2.29E-03	476	5.20E-03	517	1.01E-02	558	1.29E-02
395	9.49E-04	436	2.17E-03	477	5.36E-03	518	1.01E-02	559	1.29E-02
396	1.28E-03	437	2.09E-03	478	5.52E-03	519	1.01E-02	560	1.30E-02
397	1.72E-03	438	2.04E-03	479	5.68E-03	520	1.02E-02	561	1.31E-02
398	2.23E-03	439	2.01E-03	480	5.87E-03	521	1.03E-02	562	1.32E-02
399	2.83E-03	440	2.00E-03	481	6.04E-03	522	1.03E-02	563	1.32E-02
400	3.57E-03	441	2.03E-03	482	6.22E-03	523	1.04E-02	564	1.33E-02
401	4.47E-03	442	2.04E-03	483	6.39E-03	524	1.04E-02	565	1.34E-02
402	5.44E-03	443	2.08E-03	484	6.59E-03	525	1.05E-02	566	1.35E-02
403	6.49E-03	444	2.13E-03	485	6.75E-03	526	1.05E-02	567	1.36E-02
404	7.57E-03	445	2.17E-03	486	6.93E-03	527	1.06E-02	568	1.37E-02
405	8.84E-03	446	2.23E-03	487	7.13E-03	528	1.07E-02	569	1.38E-02
406	9.90E-03	447	2.30E-03	488	7.29E-03	529	1.07E-02	570	1.39E-02
407	1.10E-02	448	2.37E-03	489	7.46E-03	530	1.07E-02	571	1.40E-02
408	1.19E-02	449	2.43E-03	490	7.66E-03	531	1.08E-02	572	1.41E-02
409	1.26E-02	450	2.50E-03	491	7.82E-03	532	1.09E-02	573	1.42E-02
410	1.32E-02	451	2.57E-03	492	7.97E-03	533	1.10E-02	574	1.43E-02
411	1.37E-02	452	2.66E-03	493	8.11E-03	534	1.10E-02	575	1.45E-02
412	1.39E-02	453	2.73E-03	494	8.27E-03	535	1.11E-02	576	1.46E-02
413	1.40E-02	454	2.80E-03	495	8.42E-03	536	1.12E-02	577	1.47E-02
414	1.39E-02	455	2.90E-03	496	8.54E-03	537	1.13E-02	578	1.49E-02
415	1.37E-02	456	2.97E-03	497	8.70E-03	538	1.13E-02	579	1.50E-02
416	1.34E-02	457	3.05E-03	498	8.80E-03	539	1.14E-02	580	1.51E-02
417	1.29E-02	458	3.14E-03	499	8.89E-03	540	1.15E-02	581	1.53E-02
418	1.23E-02	459	3.23E-03	500	9.02E-03	541	1.16E-02	582	1.54E-02
419	1.16E-02	460	3.30E-03	501	9.14E-03	542	1.16E-02	583	1.56E-02
420	1.07E-02	461	3.39E-03	502	9.21E-03	543	1.17E-02	584	1.57E-02

Spectral Power Distribution

WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
585	1.59E-02	626	2.37E-02	667	1.94E-02	708	8.95E-03	749	3.07E-03
586	1.61E-02	627	2.38E-02	668	1.91E-02	709	8.75E-03	750	2.98E-03
587	1.62E-02	628	2.39E-02	669	1.89E-02	710	8.55E-03	751	2.91E-03
588	1.65E-02	629	2.39E-02	670	1.86E-02	711	8.35E-03	752	2.84E-03
589	1.66E-02	630	2.40E-02	671	1.83E-02	712	8.16E-03	753	2.75E-03
590	1.68E-02	631	2.41E-02	672	1.81E-02	713	7.97E-03	754	2.68E-03
591	1.70E-02	632	2.41E-02	673	1.78E-02	714	7.78E-03	755	2.61E-03
592	1.72E-02	633	2.41E-02	674	1.76E-02	715	7.60E-03	756	2.54E-03
593	1.74E-02	634	2.41E-02	675	1.73E-02	716	7.44E-03	757	2.46E-03
594	1.76E-02	635	2.41E-02	676	1.71E-02	717	7.24E-03	758	2.39E-03
595	1.79E-02	636	2.41E-02	677	1.68E-02	718	7.08E-03	759	2.33E-03
596	1.80E-02	637	2.41E-02	678	1.65E-02	719	6.89E-03	760	2.26E-03
597	1.83E-02	638	2.41E-02	679	1.62E-02	720	6.74E-03	761	2.21E-03
598	1.85E-02	639	2.41E-02	680	1.60E-02	721	6.58E-03	762	2.14E-03
599	1.87E-02	640	2.40E-02	681	1.57E-02	722	6.41E-03	763	2.07E-03
600	1.89E-02	641	2.39E-02	682	1.55E-02	723	6.25E-03	764	2.03E-03
601	1.92E-02	642	2.39E-02	683	1.52E-02	724	6.08E-03	765	1.97E-03
602	1.94E-02	643	2.38E-02	684	1.49E-02	725	5.95E-03	766	1.90E-03
603	1.96E-02	644	2.37E-02	685	1.46E-02	726	5.79E-03	767	1.86E-03
604	1.98E-02	645	2.36E-02	686	1.44E-02	727	5.64E-03	768	1.80E-03
605	2.01E-02	646	2.35E-02	687	1.41E-02	728	5.48E-03	769	1.75E-03
606	2.03E-02	647	2.34E-02	688	1.38E-02	729	5.34E-03	770	1.69E-03
607	2.05E-02	648	2.32E-02	689	1.36E-02	730	5.22E-03	771	1.64E-03
608	2.07E-02	649	2.31E-02	690	1.33E-02	731	5.08E-03	772	1.61E-03
609	2.10E-02	650	2.30E-02	691	1.30E-02	732	4.92E-03	773	1.56E-03
610	2.11E-02	651	2.28E-02	692	1.28E-02	733	4.81E-03	774	1.51E-03
611	2.14E-02	652	2.26E-02	693	1.25E-02	734	4.67E-03	775	1.46E-03
612	2.16E-02	653	2.25E-02	694	1.23E-02	735	4.54E-03	776	1.42E-03
613	2.18E-02	654	2.23E-02	695	1.20E-02	736	4.42E-03	777	1.38E-03
614	2.20E-02	655	2.21E-02	696	1.18E-02	737	4.29E-03	778	1.33E-03
615	2.21E-02	656	2.19E-02	697	1.15E-02	738	4.18E-03	779	1.30E-03
616	2.24E-02	657	2.17E-02	698	1.13E-02	739	4.07E-03	780	1.27E-03
617	2.25E-02	658	2.15E-02	699	1.10E-02	740	3.93E-03		
618	2.27E-02	659	2.13E-02	700	1.08E-02	741	3.84E-03		
619	2.28E-02	660	2.11E-02	701	1.05E-02	742	3.71E-03		
620	2.30E-02	661	2.08E-02	702	1.03E-02	743	3.63E-03		
621	2.31E-02	662	2.06E-02	703	1.01E-02	744	3.52E-03		
622	2.33E-02	663	2.04E-02	704	9.83E-03	745	3.42E-03		
623	2.34E-02	664	2.01E-02	705	9.61E-03	746	3.33E-03		
624	2.35E-02	665	1.99E-02	706	9.39E-03	747	3.25E-03		
625	2.36E-02	666	1.96E-02	707	9.14E-03	748	3.17E-03		

3.0 Results - Goniometric Measurements

Test conditions

Goniometer distance (m)	1
Temperature (°C)	25±1
Stabilization time (min)	50



Instrument

	Instrument	Manufacture	Model	
Photometric	Photometer and color meter	Minolta	CL-200A	
Electrical instrument	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results

Photometric		Electrical	
Central beam candle power(cd)	5457	Input voltage (V)	119.6
Beam Angle (°)	23	Current (A)	0.156
Field Angle (°)	39	Power (W)	18.4900
Chromaticity coordinates	u'= 0.2630	pf	0.9890
	v'= 0.5270		
	x = 0.4600		
	y = 0.4097		
CCT (K)	2700		

Luminous intensity distribution

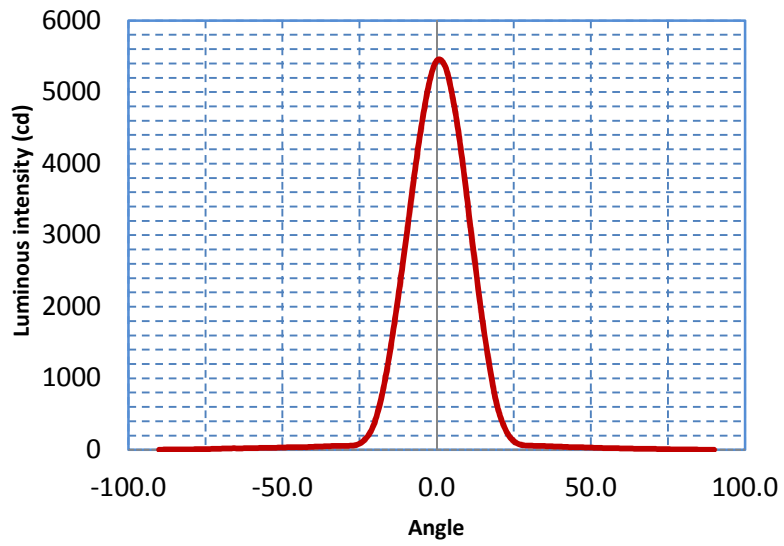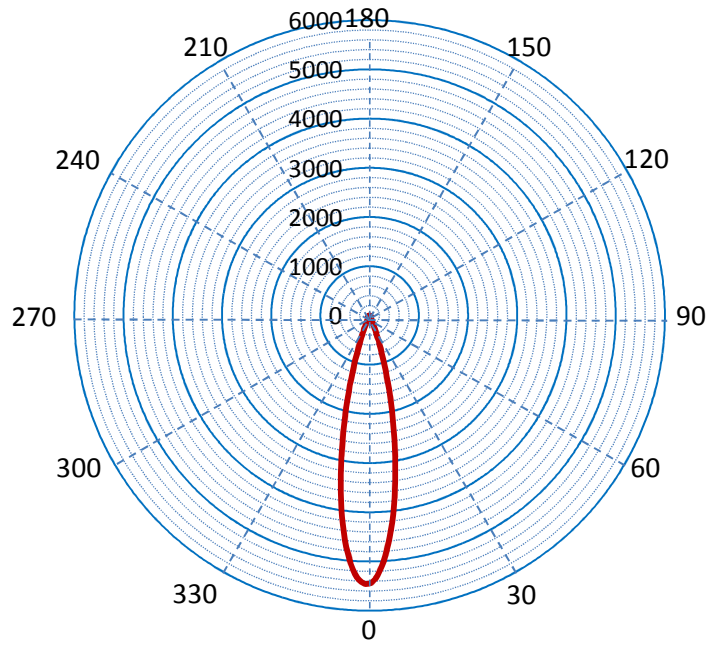


Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	69.1	11.6%	45-50	7.6	1.3%
5-10	165.3	27.8%	50-55	6.5	1.1%
10-15	164.6	27.7%	55-60	5.8	1.0%
15-20	95.2	16.0%	60-65	4.8	0.8%
20-25	30.2	5.1%	65-70	4.2	0.7%
25-30	9.2	1.6%	70-75	3.2	0.5%
30-35	8.7	1.5%	75-80	1.9	0.3%
35-40	8.8	1.5%	80-85	1.2	0.2%
40-45	7.9	1.3%	85-90	0.8	0.1%
Total lumen					595

Accumulated Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	69.1	11.6%	0-50	566.5	95.2%
0-10	234.4	39.4%	0-55	573.0	96.3%
0-15	399.0	67.1%	0-60	578.8	97.3%
0-20	494.1	83.1%	0-65	583.6	98.1%
0-25	524.4	88.2%	0-70	587.8	98.8%
0-30	533.6	89.7%	0-75	591.0	99.4%
0-35	542.3	91.2%	0-80	592.9	99.7%
0-40	551.1	92.6%	0-85	594.0	99.9%
0-45	559.0	94.0%	0-90	594.8	100.0%

Center and edge illuminance, beam and field diameter

Distance (m)	E on axis (lx)	Beam D(m)	E on the edge of beam (lx)	Field D(m)	E on the edge of field (lx)
1.0	3657	0.33	1758	0.7	308
1.5	1626	0.49	781	1.0	137
2.0	914	0.65	440	1.4	77
2.5	585	0.81	281	1.7	49
3.0	406	0.98	195	2.1	34
3.5	299	1.14	144	2.4	25
4.0	229	1.30	110	2.8	19
4.5	181	1.47	87	3.1	15
5.0	146	1.63	70	3.5	12
5.5	121	1.79	58	3.8	10
6.0	102	1.95	49	4.2	9
6.5	87	2.12	42	4.5	7
7.0	75	2.28	36	4.9	6
7.5	65	2.44	31	5.2	5
8.0	57	2.61	27	5.6	5
8.5	51	2.77	24	5.9	4
9.0	45	2.93	22	6.3	4
9.5	41	3.09	19	6.6	3
10.0	37	3.26	18	7.0	3

Beam illuminance vs. distance

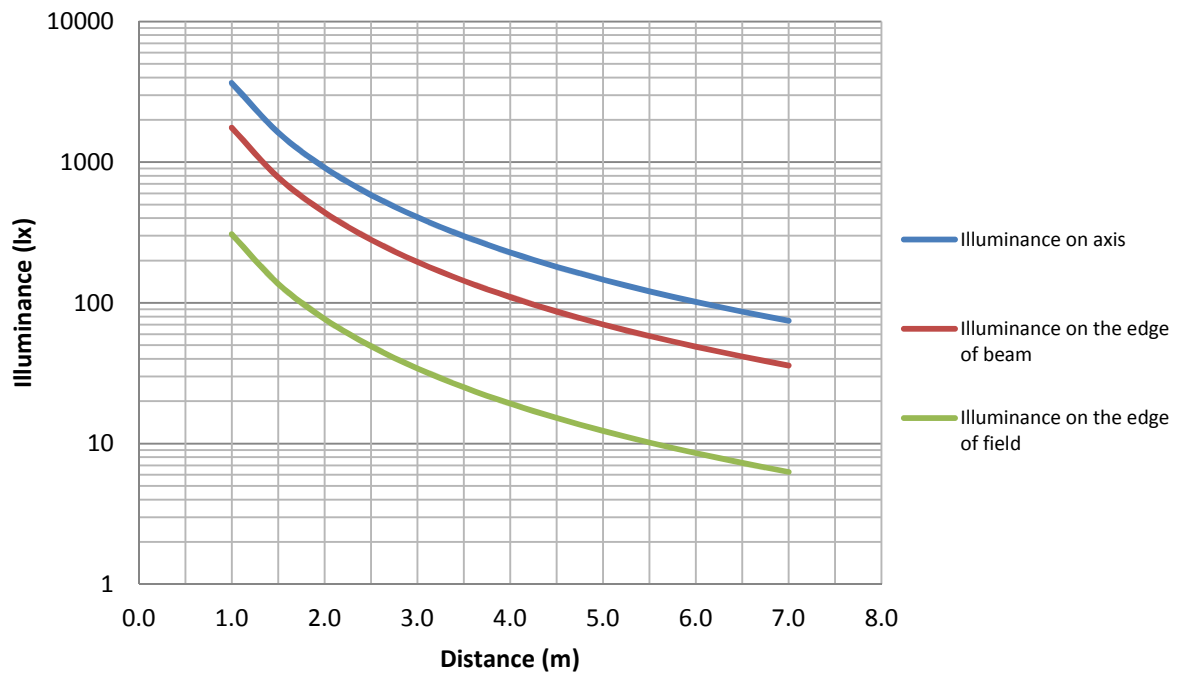

Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)
-90.0	3.3	-69.5	17.2	-49.0	33.9	-28.5	56.9	-8.0	3583.1
-89.5	3.3	-69.0	17.9	-48.5	35.0	-28.0	57.7	-7.5	3750.5
-89.0	3.4	-68.5	18.5	-48.0	36.2	-27.5	58.5	-7.0	3915.1
-88.5	3.5	-68.0	19.3	-47.5	37.2	-27.0	60.4	-6.5	4072.3
-88.0	3.6	-67.5	19.9	-47.0	37.8	-26.5	64.0	-6.0	4224.8
-87.5	3.7	-67.0	20.6	-46.5	38.2	-26.0	69.5	-5.5	4371.7
-87.0	3.9	-66.5	21.1	-46.0	38.5	-25.5	77.1	-5.0	4512.2
-86.5	4.2	-66.0	21.5	-45.5	38.9	-25.0	87.4	-4.5	4644.2
-86.0	4.5	-65.5	21.5	-45.0	39.2	-24.5	100.2	-4.0	4772.6
-85.5	4.6	-65.0	21.2	-44.5	39.2	-24.0	116.0	-3.5	4894.4
-85.0	4.9	-64.5	21.0	-44.0	39.2	-23.5	134.9	-3.0	5006.9
-84.5	5.2	-64.0	21.0	-43.5	38.9	-23.0	157.5	-2.5	5111.1
-84.0	5.5	-63.5	21.1	-43.0	38.9	-22.5	183.5	-2.0	5205.0
-83.5	5.7	-63.0	21.3	-42.5	38.9	-22.0	214.2	-1.5	5285.0
-83.0	6.0	-62.5	21.5	-42.0	39.1	-21.5	247.8	-1.0	5352.8
-82.5	6.1	-62.0	21.9	-41.5	39.4	-21.0	290.2	-0.5	5402.1
-82.0	6.4	-61.5	22.3	-41.0	40.1	-20.5	339.5	0.0	5437.5
-81.5	6.7	-61.0	22.7	-40.5	41.0	-20.0	399.0	0.5	5455.1
-81.0	6.9	-60.5	23.1	-40.0	42.5	-19.5	466.8	1.0	5457.0
-80.5	7.2	-60.0	23.4	-39.5	44.4	-19.0	543.2	1.5	5444.9
-80.0	7.3	-59.5	23.9	-39.0	45.8	-18.5	626.2	2.0	5420.7
-79.5	7.6	-59.0	24.5	-38.5	46.7	-18.0	716.3	2.5	5383.5
-79.0	7.9	-58.5	25.1	-38.0	47.2	-17.5	812.3	3.0	5331.5
-78.5	8.2	-58.0	25.7	-37.5	47.7	-17.0	919.7	3.5	5261.7
-78.0	8.5	-57.5	26.0	-37.0	48.1	-16.5	1034.1	4.0	5177.1
-77.5	8.7	-57.0	26.4	-36.5	48.6	-16.0	1153.1	4.5	5078.5
-77.0	9.1	-56.5	26.9	-36.0	49.5	-15.5	1280.6	5.0	4966.9
-76.5	9.6	-56.0	27.3	-35.5	50.6	-15.0	1412.6	5.5	4850.7
-76.0	10.0	-55.5	27.8	-35.0	51.7	-14.5	1547.5	6.0	4731.6
-75.5	10.3	-55.0	28.3	-34.5	52.4	-14.0	1687.9	6.5	4598.6
-75.0	10.8	-54.5	28.7	-34.0	53.2	-13.5	1831.1	7.0	4457.3
-74.5	11.3	-54.0	29.1	-33.5	53.9	-13.0	1979.9	7.5	4306.6
-74.0	11.7	-53.5	29.4	-33.0	54.4	-12.5	2130.5	8.0	4148.5
-73.5	12.2	-53.0	29.6	-32.5	54.3	-12.0	2284.0	8.5	3985.8
-73.0	12.6	-52.5	29.9	-32.0	54.3	-11.5	2435.6	9.0	3816.6
-72.5	13.1	-52.0	30.2	-31.5	54.3	-11.0	2596.4	9.5	3642.6
-72.0	13.8	-51.5	30.6	-31.0	54.1	-10.5	2759.2	10.0	3463.2
-71.5	14.4	-51.0	31.1	-30.5	54.0	-10.0	2922.9	10.5	3282.8
-71.0	15.1	-50.5	31.5	-30.0	54.4	-9.5	3088.4	11.0	3104.2
-70.5	15.8	-50.0	32.1	-29.5	55.1	-9.0	3252.1	11.5	2927.5
-70.0	16.6	-49.5	32.8	-29.0	56.0	-8.5	3416.7	12.0	2754.5

Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)		
12.5	2585.3	33.0	54.6	53.5	26.4	74.0	9.7		
13.0	2416.0	33.5	54.4	54.0	25.9	74.5	9.2		
13.5	2247.7	34.0	54.1	54.5	25.4	75.0	8.6		
14.0	2082.2	34.5	54.0	55.0	24.9	75.5	8.3		
14.5	1920.4	35.0	53.5	55.5	24.6	76.0	7.9		
15.0	1765.1	35.5	52.2	56.0	24.2	76.5	7.4		
15.5	1619.1	36.0	50.9	56.5	24.0	77.0	7.0		
16.0	1476.8	36.5	50.1	57.0	23.8	77.5	6.6		
16.5	1339.1	37.0	49.7	57.5	23.4	78.0	6.1		
17.0	1205.2	37.5	48.9	58.0	22.9	78.5	5.8		
17.5	1076.0	38.0	48.0	58.5	22.3	79.0	5.4		
18.0	953.2	38.5	47.1	59.0	21.9	79.5	5.1		
18.5	837.0	39.0	46.4	59.5	21.4	80.0	4.8		
19.0	729.6	39.5	45.8	60.0	21.0	80.5	4.6		
19.5	634.6	40.0	45.3	60.5	20.6	81.0	4.6		
20.0	552.3	40.5	44.5	61.0	20.0	81.5	4.4		
20.5	481.4	41.0	43.4	61.5	19.4	82.0	4.2		
21.0	419.5	41.5	42.1	62.0	18.9	82.5	4.1		
21.5	364.5	42.0	40.7	62.5	18.3	83.0	3.9		
22.0	314.9	42.5	39.7	63.0	17.8	83.5	3.8		
22.5	268.5	43.0	39.0	63.5	17.3	84.0	3.6		
23.0	227.4	43.5	38.3	64.0	16.7	84.5	3.5		
23.5	193.6	44.0	37.8	64.5	16.3	85.0	3.3		
24.0	165.5	44.5	37.3	65.0	15.9	85.5	3.3		
24.5	141.9	45.0	36.7	65.5	15.6	86.0	3.1		
25.0	122.2	45.5	36.2	66.0	15.5	86.5	2.9		
25.5	105.9	46.0	35.8	66.5	15.5	87.0	2.8		
26.0	92.7	46.5	35.4	67.0	15.4	87.5	2.6		
26.5	82.1	47.0	35.2	67.5	15.3	88.0	2.5		
27.0	73.9	47.5	35.0	68.0	15.2	88.5	2.3		
27.5	68.0	48.0	34.4	68.5	14.8	89.0	2.2		
28.0	64.1	48.5	33.7	69.0	14.5	89.5	2.1		
28.5	61.6	49.0	32.9	69.5	14.1	90.0	2.1		
29.0	59.9	49.5	32.1	70.0	13.8				
29.5	58.6	50.0	31.2	70.5	13.3				
30.0	57.9	50.5	30.4	71.0	12.9				
30.5	57.8	51.0	29.6	71.5	12.4				
31.0	57.2	51.5	28.8	72.0	11.9				
31.5	56.4	52.0	28.3	72.5	11.3				
32.0	55.8	52.5	27.7	73.0	10.8				
32.5	55.1	53.0	27.1	73.5	10.2				