





GE
Lighting

44724 - 4752

GE PAR36 - CIM

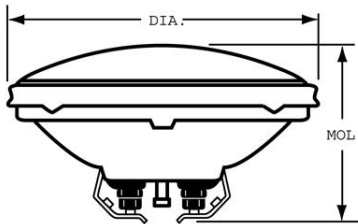

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	2C-6
Rated Life (NOM)	800.0 h
Primary Application	CIM

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	50.0 - 10.0 °
Beam Spread - Vertical	25.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	2000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	60.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	44724
Description	4752
ANSI Code	4752
Standard Package	Case
Standard Package GTIN	10043168447246
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168447249