

HP2627P • HP2627PBL

Ballast Type:	Electromagnetic
Input Voltage:	277VAC +5%,-10%
Input Frequency:	60 Hz.

Starting Method:	Preheat
Lamp Connection:	Series
Unit Color:	Black

Unit Weight	1.95 lb.
Carton Quantity:	24
Skid Quantity:	1440

ELECTRICAL SPECIFICATION:

[illegible]

PERFORMANCE:

- Electromagnetic lead type ballast
- Preheat start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- Meets ANSI C82.1

APPLICATION:


- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 25°F/-4°C
- Remote mounting: 10 ft.

SAFETY:

- UL listed (Class P, Type HL, Type 1 outdoor)
- CSA/C22.2 Certified
- Automatic reset thermal protector
- No PCB's
- RoHS Compliant

STYLE:


8

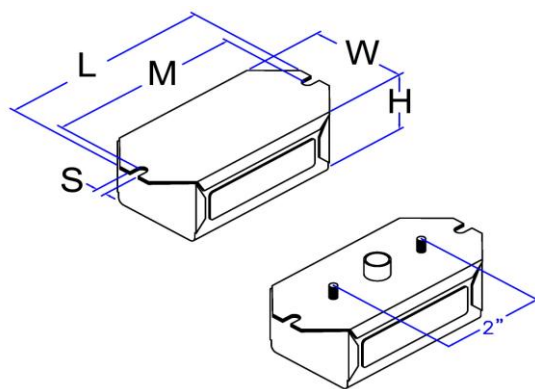

H	W	L	M	S
1 5/8	2 3/16	4 3/4	4 3/8	7/32
1.63	2.19	4.75	4.38	0.22
4.14cm	5.56cm	12.07cm	11.13cm	0.56cm

WIRING DIAGRAM:

102

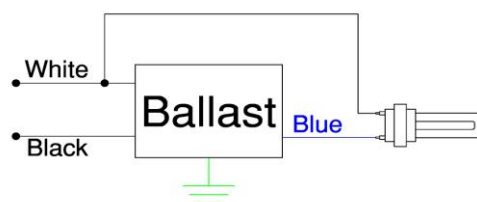

Standard lead lengths:

Side Lead:

- Blk: 12" • Blu: 12" • Wht: 12"
- Bottom Lead:
- Blk: 12" • Blu: 12" • Wht: 12"
- * 3/8" Strip

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

Revised 12/17/10

ROBERTSON WORLDWIDE

13611 Thornton Rd. Blue Island, IL 60406. TEL: 1-800-323-5633. FAX: 1-877-388-2420. www.robertsonww.com