



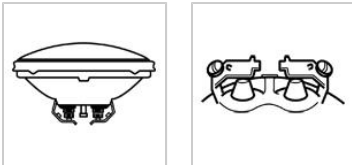

GE  
Lighting

**14555 - 25PAR 36WFL**

GE PAR36 - Wide Flood

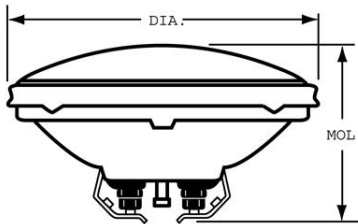

**GENERAL CHARACTERISTICS**

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	2000.0 h
Primary Application	Wide Flood

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (NOM)	150.0
Beam Spread - Horizontal	49.0 - 10.0 °/37.0 - 50.0 °
Beam Spread - Vertical	41.0 - 10.0 °/26.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	360.0
Max. Beam Candlepower (MBCP) (MAX)	360.0
Nominal Initial Lumens per Watt (NOM)	6.0

**ELECTRICAL CHARACTERISTICS**

Wattage (NOM)	25.0
Voltage (NOM)	12.0

**DIMENSIONS**

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

**PRODUCT INFORMATION**

Product Code	14555
Description	25PAR 36WFL
Standard Package	Case
Standard Package GTIN	00043168145558
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168906456

**NOTES**

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light