



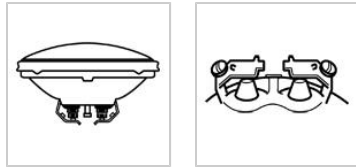

GE
Lighting

19880 - 50PAR36/H/FL30

GE PAR36 - Wide Flood

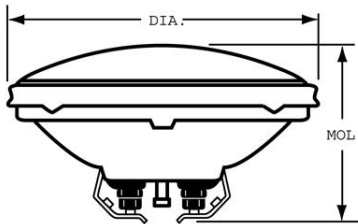

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	4000.0 h
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	400.0
Beam Spread (NOM)	30.0 °
Beam Spread - Horizontal	40.0 - 10.0 °
Beam Spread - Vertical	34.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	1300.0
Color Temperature (NOM)	3050.0 K
Max. Beam Candlepower (MBCP) (MAX)	1300.0
Nominal Initial Lumens per Watt (NOM)	8.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	19880
Description	50PAR36/H/FL30
Standard Package	Case
Standard Package GTIN	00043168198806
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168970266