




GE
Lighting

75401 - F40/25BX841IS/WM

GE Biax® T5 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

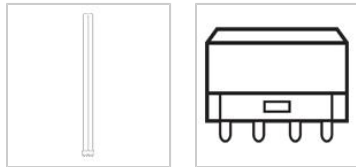

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Fluorescent lamp lumens decline during life

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T5
Base	4-Pin (2G11)
Equivalent Wattage (NOM)	100.0 W
Rated Life (NOM)	20000.0 h
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	4.0 mg
Picograms of Mercury (NOM)	96.2 pg
Additional Info	TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2600.0
Mean Lumens (NOM)	2400.0
Nominal Initial Lumens per Watt (NOM)	104.0
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Voltage (NOM)	120.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	21.500 in(546.1 mm)
Nominal Length (NOM)	21.500 in(546.1 mm)

PRODUCT INFORMATION

Product Code	75401
Description	F40/25BX841IS/WM
Standard Package	Master
Standard Package GTIN	10043168754016
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	40
Package	
UPC	043168754019