

# WMC LED Wall-PACK Light DataSheet



photo controller available



E352127

Wet Locations




Model :		WMC201-01	WMC301-01
OVERALL LAMP PARAMETERS	Input Voltage	100-277VAC	
	Input Current	0.5A @100V / 0.2A @277V	
	Input Power	22W	30W
	Power Factor	PF≥0.95	
	Luminance	1400LM	2000LM
	Luminous Efficiency	65LM/W	65LM/W
	CRI	>70	>70
	Beam Angle	180°	
	Main Structure	Aluminium + Polycarbonate	
LED DRIVER	Output Voltage	12-24VDC	18-36VDC
	Output Current	0.9A	0.9A
	Driver Efficiency	87%	88%
LED	LED Brand	XBD	XBD
	LED Quantity	14PCS	18PCS
	LED Manufacturer	Cree	Cree
	LED Efficacy	110LM/W	110LM/W
	Color Temperature	WW / NW / PW / CW (3000K-6000K)	
LIFESPAN & ENVIRONMENT	Lifespan	50000Hrs.	
	Warranty	5 Years	
	IP Rating	IP54, Wet Locations	
	Operating Temperature	-20°C—+40°C	
	Storage Temperature.Humidity	-40°C—+80°C , 10—90% RH	
SAFETY&EMC	Safety Norms	UL1598,UL8750, EN60598, EN61347-2-13, EN62031, EN62471	
	Withstand Voltage	I/P-FG: 2121VDC	
	Grounding Resistance	25A 100mΩ	
	Electromagnetic Compatibility	EN55015, EN61000-2-3, EN61000-3-3, EN61547	
OTHERS	Dimension	Please refer to attached dimension drawing	
	Net Weight	1.5KG	
	Gross Weight	2.0KG	
	Packing Size	400x310x470mm	
	Q'ty / Carton	6PCS	
	Volume	0.062CBM	

Dimension :

**1. Square Lens**

photo controller place

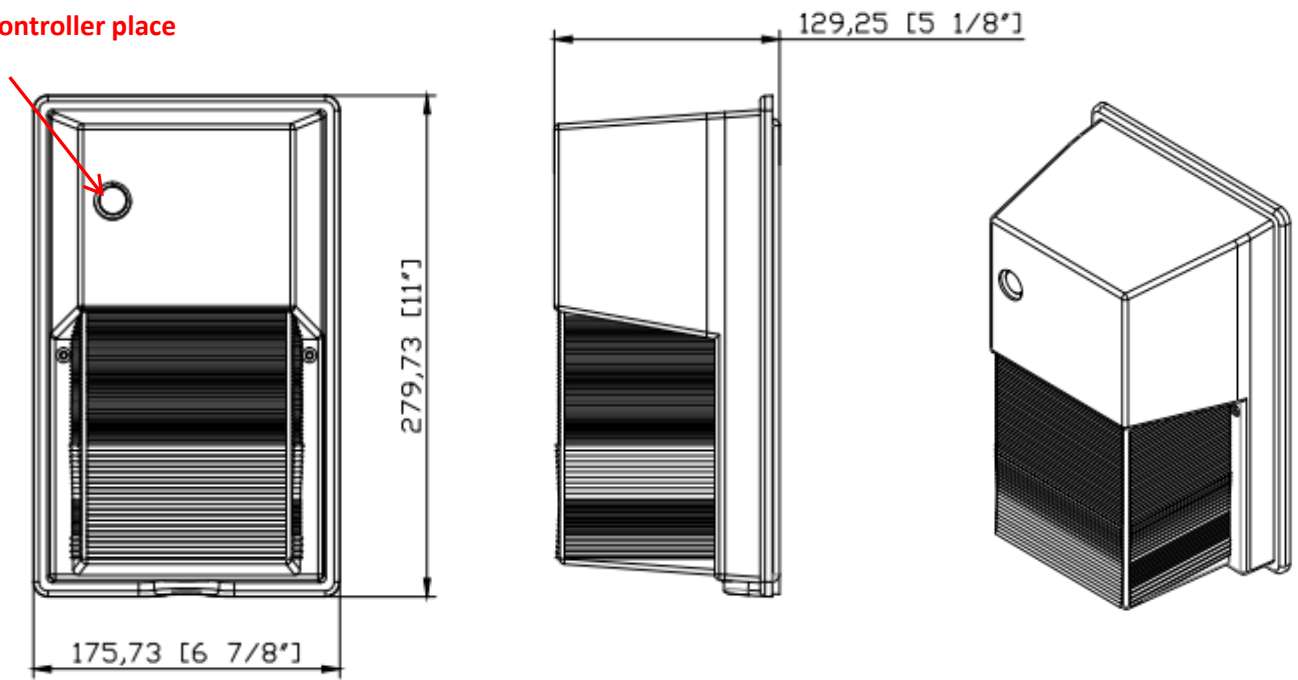

**2. Arcuate Lens**

