

A19 6.5W DIM. TITANIUM LED SERIES 4.0



PRO



- ⌚ Omnidirectional: 300° beam angle
- ⌚ High efficacy 74 LPW in Warm White
- ⌚ 30% energy savings compared to CFL
- ⌚ Comfortable warm diffused light
- ⌚ Natural A-lamp look fits all applications
- ⌚ Suitable for use in totally enclosed fixtures

6.5W REPLACES



40W Inc.

80% Energy Savings

\$113 Savings per lamp*




A19 PRODUCT FEATURES

Omnidirectional Lighting

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 300° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



Exceptional Efficacy

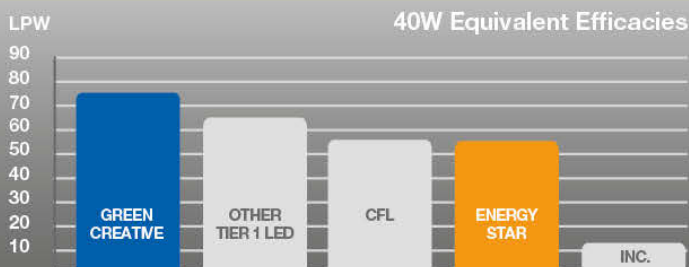

At 74 LPW, this lamp's efficacy is over 10% higher than the Tier 1 LED A19 40W replacement average and exceeds the new ENERGY STAR requirements by upwards of 35%. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

A19 6.5W DIM. TITANIUM LED SERIES 4.0



APPLICATIONS

General Lighting



Downlighting



Uplighting



Ref.#: DSC09-A19-6.5W

SPECIFICATIONS

Product Model	40732 6.5A19G4DIM/827	40733 6.5A19G4DIM/830
Type	A19	A19
Base	E26	E26
Power (W)	6.5	6.5
Voltage - Frequency	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K	Warm White 3000K
CRI (Ra)	80	80
Typical lumens (lm)	470	480
Efficacy (LPW)	72	74
Beam Angle	300°	300°
Dimmable	Yes***	Yes***
Power Factor	0.9	0.9
Rated Lifetime - L70 (hrs.)	25,000	25,000
Dia. x MOL	2.36"x4.41" (60x112mm)	2.36"x4.41" (60x112mm)
Weight (lb. / g)	0.24 lb. / 111g	0.24 lb. / 111g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$12 LED with 25,000-hr lifetime
 ** Suitable for use in totally enclosed fixtures

*** List of tested dimmer switches available on website
 **** Suitable for damp locations. Not for use where directly exposed to weather or water