

LED Series

LED Flat Top Bollard with Louvers



BOFLLF

Housing:

Extruded aluminum housing with flush mounting base & vandal-resistant screws, flat top, powdercoat finish over a chromate conversion coating, internal ballast tray for easy maintenance

Reflector:

Cast aluminum louvers

Lens:

Clear polycarbonate lens

Mounting:

Mounting Kit with 8" anchor bolts (Included)

LG LED Module:

Luminous Flux: See Chart
 CRI: 70+, CCT: 4000K, 5700K or 6500K
 Operating Temperature: -40 ~ 50°C
 50,000 Hours
 Module has IP67 Rating
 RoHS Compliant

Wattage:

LED: 1 x 9 or 12w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Listing & Ratings:

CSA: Listed for wet locations

Options:

Dimmable Driver
 2.5KV Surge Protection

Custom colors available upon request.

Bollards can be cut to custom lengths upon request.

LED Flat Top Bollard with Louvers

Catalog #

Description

Complete Units

Ordering Information

Example: BOFLLF1X12U4KZSP


BOFL	Model:	BOFL
L	LED Mfr:	L=LG Innotek
F	Optics:	F=Medium Beam Spread
1X	Number of Modules:	1X=One
12	Wattage:	9=9w, 12=12w
U	Ballast:	U=120-277V
4K	Color Temp:	4K=4000K, 57K=5700K, 65K=6500K
Z	Color:	Z=Bronze, W=White, B=Black
-	Mounting:	N/A
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

LD

Total Luminous Flux per Module

		Optic Type					
		C		F		I	
		12w	9w	12w	9w	12w	9w
CCT	6500K	1288	850	1345	888	1296	856
	5700K	1288	850	1345	888	1296	856
	4000K	1076	710	1100	726	1088	718

Dimensions

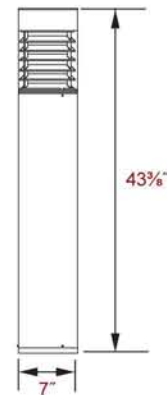

BOFLLF


LD-111

LD


Catalog #	Description
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BOLPC	Replacement Polycarbonate Lens

LED Series

LED Flat Top Bollard with Louvers



BOLAN



BOLPC