

Type
Project
Catalog No.
Lamp/Wattage

**NTLE-203 Low Voltage Track
Versa Cylinder w/ Dimmable Integral Electronic
Driver/Transformer, LED compatible**
Lamp: 3W-50W MR16

PRODUCT DESCRIPTION

Low voltage die cast aluminum designer cube fixtures with integral transformer/driver. Compatible with several LED MR16 lamps as well as halogen MR16 lamps. Yoke provides full adjustment of light source for special aiming and dual tightening knobs assure secure lock on angle position.

FEATURES

- Compatible with several LED MR16 lamps or halogen MR16 lamps (not included)
- Die cast aluminum provides superior strength and rigidity.
- Low profile, aesthetic design.
- Adjustable yoke for custom aiming.
- Clear shield included with fixture.
- High-strength stainless steel electrical contacts.
- One or two circuit track capable.

CONSTRUCTION

Contact Head Assembly

Three .030 stainless steel contacts mounted in high heat rated plastic housing

Housing

.030 die cast aluminum construction; cubical appearance and design features. All edges are softened for aesthetic appearance. Perforated spherical screen in rear functions as wire outlet and provides additional design benefit.

Yoke

.085 Rigid steel yoke connects fixture housing to electrical contact head. Dual plastic angle tightening knobs maintain clean, decorative appearance of the fixture and provides secure angle position.

Socket

Porcelain socket for GU5.3 12V MR16 lamp.

Lamp

3W-50W 12V MR16 Halogen or LED Lamp (Ordered Separately).
MR16 LED compatible

Lamp Shield

High temperature glass shield included. Mounted to front of lamp fixture and held in place with high-tension retaining spring clip.

Electrical System

1. **Transformer** – Solid state LED Driver provides noise-free voltage reduction and operation. If dimming, use electronic low voltage rated only dimming controls.

NTLE-203:


Integral Unit - NTL-203: 120V/60Hz Input; 12V Output; 60VA Max. Load

2. **Wiring** - Teflon coated wire lead connects socket and housing to electrical contact head.

Teflon coating is durable and resists heat degradation from lamp and housing radiation.

DIMENSIONS

NTLE-203

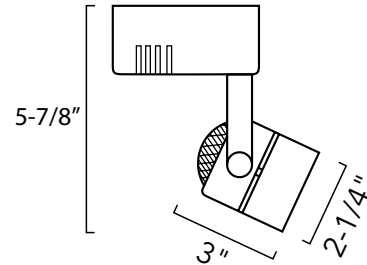

LED Driver (0W-60W)
Length: 3", Dia.: 2-1/4", Max Ext.: 5-7/8"

One/Two Circuit Conversion

Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory but may be raised to the higher position to install onto the second circuit of Nora Lighting NT-2300 series two-circuit track.

Optional Accessories

NM-100/MR16 MR16 Filter
(Blue, Clear, Frosted, Green, Linear, Pink, Red, Spread, Yellow)

Labels and Listings

cULus listed



For a list of compatible LED MR16 lamps please refer to "Compatibility" tab under the "Resources" tab of the Nora web site.

Versa Cylinder with Dimmable Integral Electronic Driver/Transformer

Low Volt Track head

Catalog No.	Finish
NTLE-203	B = Black BZ = Bronze NM = Natural Metal W = White

Create a complete item number: Example: NTLE - 203B