




GE
Lighting

73295 - F28T8/XLSPX50CVG

GE Ecolux® covRguard® UltraMax™ Starcoat® T8

• Passes TCLP, which can lower disposal costs.

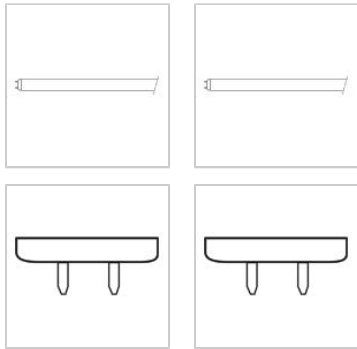

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	40000.0 h
Rated Life (rapid start) @ Time	45000.0 @ 3.0/50000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	15.0 °C
Mercury Content (NOM)	3.0 mg
Picograms of Mercury (NOM)	34.6 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2546.0
Mean Lumens (NOM)	2344.0
Nominal Initial Lumens per Watt (NOM)	90.92857
Color Temperature (NOM)	5000.0 K
Color Rendering Index (CRI) (NOM)	80.0
S/P Ratio (Scotopic/Photopic Ratio) (NOM)	2.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	28.0
Cathode Resistance Ratio	- 4.25
Rh/Rc (MIN)	
Cathode Resistance Ratio	- 6.5
Rh/Rc (MAX)	
Lamp Current (NOM)	275.0 mA
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	48.000 in(1219.2 mm)
Minimum Overall Length (NOM)	47.780 in(1213.6 mm)
Nominal Length (NOM)	48.000 in(1219.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Max Base Face to Base Face (A) (NOM)	47.220 in(1199.4 mm)
Face to End of Opposing Pin (B) (MIN)	47.400 in(1204.0 mm)
Face to End of Opposing Pin (B) (MAX)	47.500 in(1206.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	47.670 in(1210.8 mm)

PRODUCT INFORMATION

Product Code	73295
Description	F28T8/XLSPX50CVG
Standard Package	Case
Standard Package GTIN	10043168732953
Standard Package Quantity	36
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	36
UPC	043168732956

LAMPS COMPATIBLE WITH THIS POWER SUPPLY

LED Display Case Lights
72867
73295