



GE
Lighting

35884 - F15T8/BL 6PK

GE black light 15 watt T8 1-pack

- 1.0 inch diameter T8 with medium bi-pin (g13) base
- 18 inches long
- Black light bulb
- Designed with a special filter glass that absorbs most of the visible light, while creating a fluorescent or glowing effect when directed at certain objects or materials
- GE black light fluorescent bulbs are designed with a special filter glass that absorbs most of the visible light, creating a glowing effect when directed at certain materials. Use everywhere you want to create a visually dramatic atmosphere as well as in insect traps and inspection applications
- Lasts 3.4 years based on 6 hours per day usage
- Use everywhere you want to create a visually dramatic atmosphere



GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	7500.0 h
Starting Temperature (MIN)	7500 h @ 3 h
Mercury Content (NOM)	10.0 °C
Primary Application	18.0 mg
	Blacklight;Speciality

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	15.0
---------------	------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	18.000 in(457.2 mm)
Nominal Length (NOM)	18.000 in(457.2 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)

PRODUCT INFORMATION

Product Code	35884
Description	F15T8/BL 6PK
Standard Package	BUNDLE
Standard Package GTIN	00043168358842
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168982061

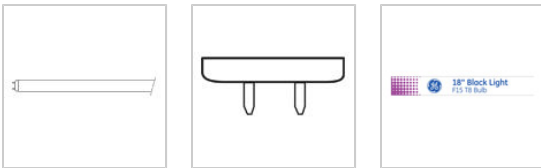

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Do not use excessive force when installing lamp.
 - Wear safety glasses and gloves when handling lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Percent Irradiance

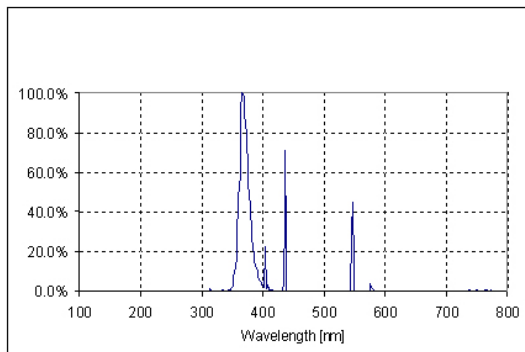


Graphs_Spectral Power Distribution

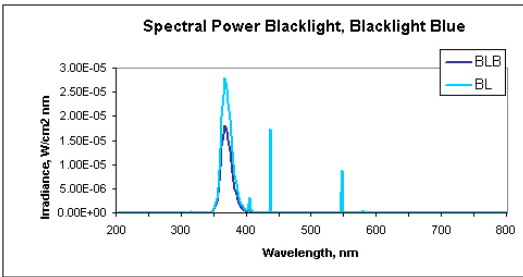

Graphs_UV Maintenance

Relative UV Maintenance

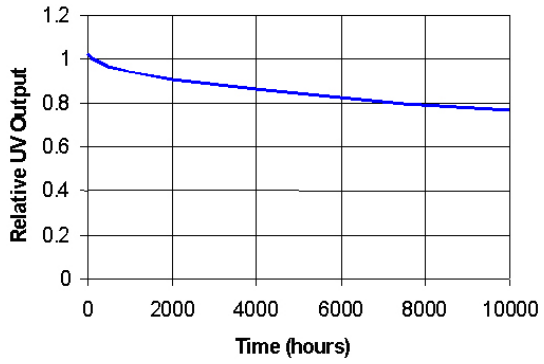

Graphs_UV Maintenance

