


DLS56

5" - 6" LED SURFACE MOUNT DOWNLIGHT

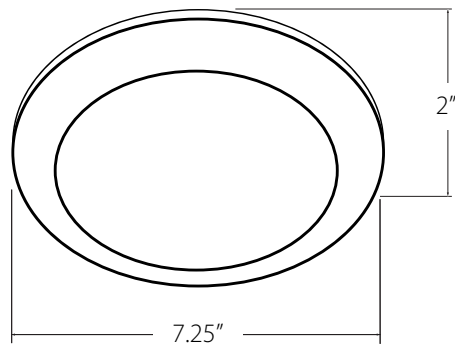

Part of NICOR's D-Series, the new DLS56 is the perfect LED downlight for surface mount applications. With the DLS all that is required for installation is a 4/O J-box. If there is already a housing in place, don't fret - The DLS is versatile enough for use in most 4", 5" or 6" recessed housings. Upgrading to energy efficient LED lighting has never been easier, or more affordable. The DLS is dimmable to 10%, suitable for use in wet locations, and available in 2700K, 3000K, or 4000K color temperatures. The DLS provides superior efficacy and a longer life than compact fluorescents, with the pleasant light quality you expect from an incandescent lamp.

FEATURES

- Die cast aluminum trim routes heat away from electrical components
- White polycarbonate diffuser eliminates hot spots creating uniform light distribution
- Greater than 90 CRI and an R9 greater than 50
- Dimmable to 10% with most standard dimmers
- Thermally protected, high efficiency driver
- Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
- Lifetime rated for greater than 50,000 hours
- LM79, LM-80 testing performed in accordance with IESNA standards
- Exterior white powder coat finish
- Easy installation with snap-in mounting bracket over a plastic or metal 4/O J-box



PRODUCT SPECIFICATIONS					
Series	Input Voltage (VAC)	Delivered Lumens (Lm)	System Level Power (W)	System Efficacy (Lm/W)	Color Rendering Index (CRI)
DLS56-2009-120-3K-WH	120	1022	15	68	95
DLS56-2012-120-3K-WH	120	1337	17	77	95

ORDERING INFORMATION					Example: DLS56-2012-120-3K-WH
Series	Version	Voltage	CCT's	Trim Color	
DLS56	2009 (2.0 900lm)	120	2K (2700)	WH (white)	
	2012 (2.0 1200lm)		3K (3000)		
			4K (4000)		