

# PAR38 17W DIM. TITANIUM CRI<sup>SP</sup> LED SERIES 4.0



17W REPLACES



**120W Hal.**

80% Energy Savings

CRI<sup>SP</sup>




**\$331** Savings per lamp\*

- Full-face REFINE optic and sleek design
- Exceptional color rendering CRI 90
- Richer reds and natural skin tones (R9 50, R13 90)
- Tight LED binning for consistent CCT across all lamps
- Suitable for use in totally enclosed fixtures
- Wet location rated for outdoor use



## PATENT PENDING REFINE OPTIC


The innovative REFINE optic provides a high candela to lumen ratio, optimizing light usage for directional applications.

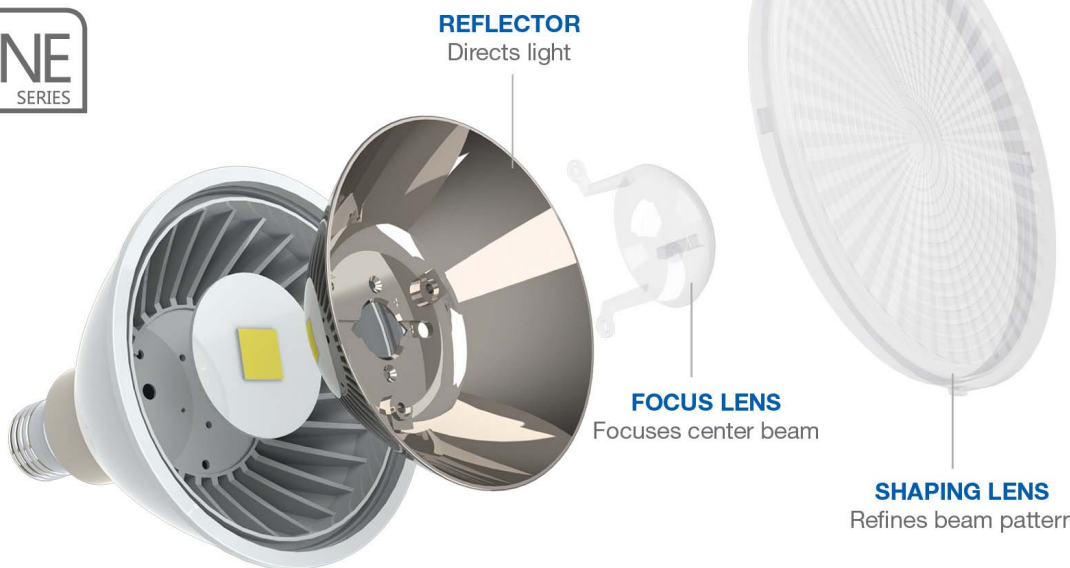

WATCH THE VIDEO


## ILLUMINANCE & CANDELA DISTRIBUTION

18.5PAR38G4DIM/930SP15




Diameter	Footcandles
0.8	1222
1.6	306
2.4	136
3.2	76
3.9	49

18.5PAR38G4DIM/930NF25




Diameter	Footcandles
1.3	600
2.7	150
4	67
5.3	38
6.7	24


17PAR38G4DIM/930FL40




Diameter	Footcandles
2.2	278
4.4	69
6.6	31
8.7	17
10.9	11



Degree	Candela
0	11,000
5	6028
15	835
25	188
35	111
45	83




Degree	Candela
0	5400
5	4875
15	143
25	294
35	106
45	85



Degree	Candela
0	2500
5	2329
15	1489
25	381
35	143
45	74

For other CCT use the following multipliers: 2700K .95, 4000K 1.1

- Base:** E26
- Voltage:** 120V
- Dimmable:** Yes\*\*\*
- PF:** 0.9
- Lifetime:** 40,000 hrs
- Weight:** 0.75lb / 340g



## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	R9 / R13 (typ.)	Lumens	LPW	Beam Angle	CBCP (cd)
18.5PAR38G4DIM/927SP15	16147	18.5	Warm White 2700K	90	50 / 90	950	51	SP 15°	10,500
18.5PAR38G4DIM/927NF25	16148	18.5	Warm White 2700K	90	50 / 90	950	51	NF 25°	5390
17PAR38G4DIM/927FL40	16149	17	Warm White 2700K	90	50 / 90	1105	65	FL 40°	2400
18.5PAR38G4DIM/930SP15	16150	18.5	Warm White 3000K	90	50 / 90	1000	54	SP 15°	11,000
18.5PAR38G4DIM/930NF25	16151	18.5	Warm White 3000K	90	50 / 90	1000	54	NF 25°	5400
17PAR38G4DIM/930FL40	16152	17	Warm White 3000K	90	50 / 90	1150	68	FL 40°	2500
17PAR38G4DIM/940FL40	16155	17	Natural White 4000K	90	50 / 90	1200	71	FL 40°	2650
18.5PAR38G4DIM/930SP15/B •	16256	18.5	Warm White 3000K	90	50 / 90	1000	54	SP 15°	11,000
18.5PAR38G4DIM/930NF25/B •	16257	18.5	Warm White 3000K	90	50 / 90	1000	54	NF 25°	5400
17PAR38G4DIM/930FL40/B •	16258	17	Warm White 3000K	90	50 / 90	1150	68	FL 40°	2500

• Black finish

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$8 halogen with 1500-hr lifetime, \$32 LED with 40,000-hr lifetime

\*\* Suitable for use in totally enclosed fixtures

\*\*\* List of tested dimmer switches available on website

\*\*\*\* Suitable for wet locations when used in base down applications only