


PAR30 12.5W DIM. GU24 TITANIUM CRI^{SP} LED SERIES 4.0



12.5W REPLACES



75W Hal.

80% Energy Savings

CRI^{SP}

**T24
2013**

\$239 Savings per lamp*

- ⌚ Full-face REFINE optic and sleek design
- ⌚ Exceptional color rendering CRI 90
- ⌚ Richer reds and natural skin tones (R9 50, R13 90)
- ⌚ Tight LED binning for consistent CCT across all lamps
- ⌚ High efficacy 68 LPW in Warm White
- ⌚ Suitable for use in totally enclosed fixtures

40,000 H

DIMMABLE

68 LPW EFFICACY

5 YR WARRANTY


CRI (Ra) 90

ENCLOSED**



PATENT PENDING REFINE OPTIC


The innovative REFINE optic provides a high candela to lumen ratio, optimizing light usage for directional applications.

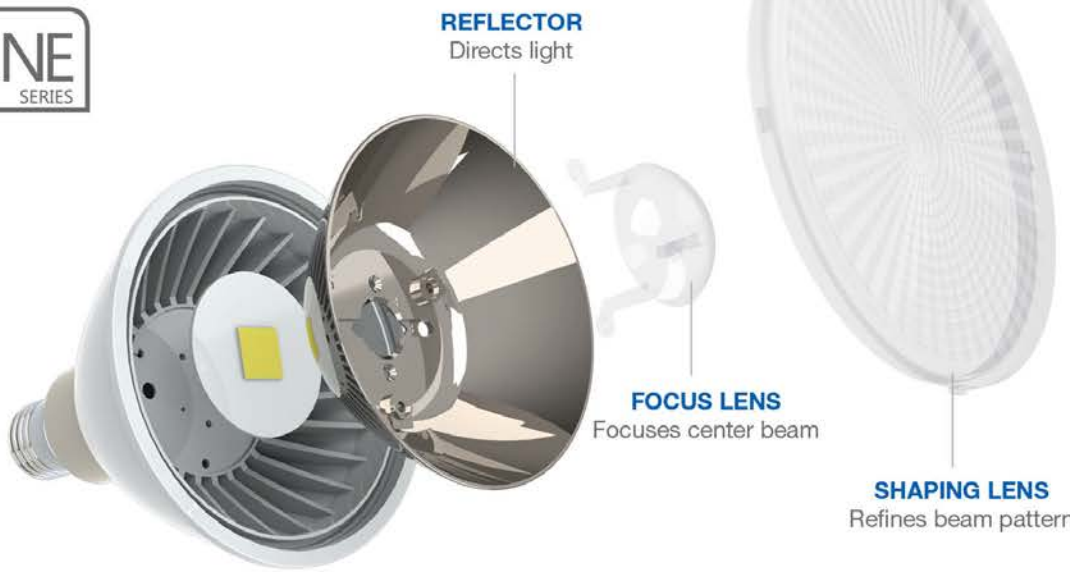


WATCH THE VIDEO

ILLUMINANCE & CANDELA DISTRIBUTION

12.5PAR30G4DIM/927FL40/GU24

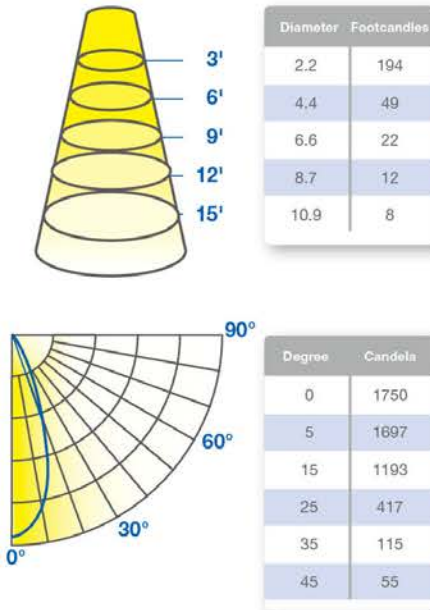

12.5PAR30G4DIM/930FL40/GU24

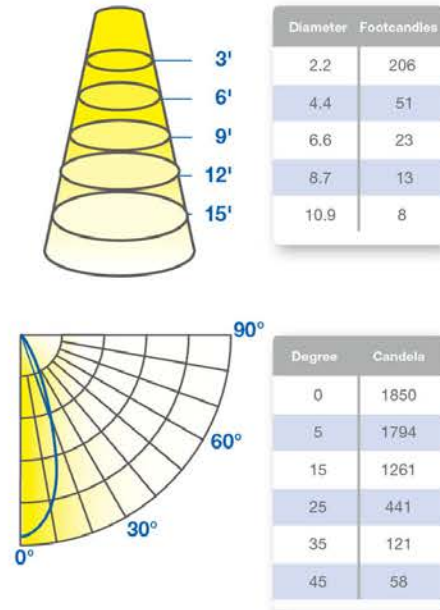

- Base:** GU24
- Voltage:** 120V
- Dimmable:** Yes***
- PF:** 0.9
- Lifetime:** 40,000 hrs
- Weight:** 0.54lb. / 244g



SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	R9 / R13 (typ.)	Lumens	LPW	Beam Angle	CBCP (cd)
12.5PAR30G4DIM/927FL40/GU24	16279	12.5	Warm White 2700K	90	50 / 90	815	65	FL 40°	1750
12.5PAR30G4DIM/930FL40/GU24	16282	12.5	Warm White 3000K	90	50 / 90	850	68	FL 40°	1850

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$8 halogen with 1500-hr lifetime, \$28 LED with 40,000-hr lifetime

** Suitable for use in totally enclosed fixtures

*** List of tested dimmer switches available on website

**** Suitable for damp locations. Not for use where directly exposed to weather or water