

A19 9W 277V TITANIUM LED SERIES 4.0



9W REPLACES



60W Inc.

80% Energy Savings

PRO



\$151 Savings per lamp*

- Universal voltage 120-277V
- Omnidirectional: 300° beam angle
- Exceptional efficacy 89 LPW in Warm White
- 40% more energy savings than CFL
- Comfortable warm diffused light
- Natural A-lamp shape fits all applications

25,000 H

120-277V
UNIVERSAL

89 LPW
EFFICACY

3 YR
WARRANTY

80
CRI (Ra)

OMNI DIRECTIONAL




A19 PRODUCT FEATURES

Omnidirectional Lighting

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 300° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



Exceptional Efficacy

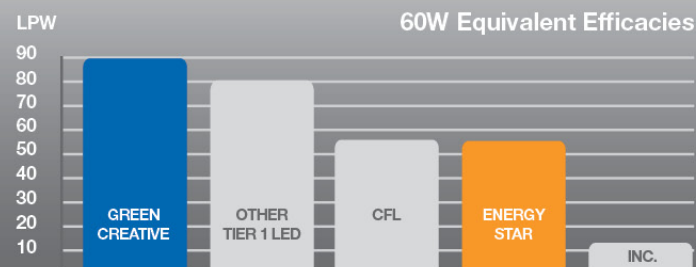

At 89 LPW, this lamp's efficacy is more than 10% higher than the Tier 1 LED A19 60W replacement industry average and exceeds new ENERGY STAR requirements by upwards of 62%. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

APPLICATIONS

General Lighting



Downlighting



Uplighting



Ref.:#DSC02-A19-9W-277V

SPECIFICATIONS

Product Model	40750 9A19G4/827/277V	40751 9A19G4/830/277V	40752 9A19G4/840/277V
Type	A19	A19	A19
Base	E26	E26	E26
Power (W)	9	9	9
Voltage - Frequency	120-277V 60Hz	120-277V 60Hz	120-277V 60Hz
Color Temp. (ANSI)	Warm White 2700K	Warm White 3000K	Natural White 4000K
CRI (Ra)	80	80	80
Typical lumens (lm)	800	800	850
Efficacy (LPW)	89	89	94
Beam Angle	300°	300°	300°
Dimmable	No	No	No
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	25,000	25,000	25,000
Dia. x MOL	2.36"x4.57" (60x116mm)	2.36"x4.57" (60x116mm)	2.36"x4.57" (60x116mm)
Weight (lb. / g)	0.26lb. / 118g	0.26lb. / 118g	0.26lb. / 118g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$16 LED with 25,000-hr lifetime

** Not intended for use in totally enclosed fixtures

*** Suitable for damp locations. Not for use where directly exposed to weather or water