

6" CDL 22W TITANIUM LED SERIES 4.0



PRO



22W REPLACES



**2X18W
CFL**



60% Energy Savings

- ⌚ Fits existing architectural and commercial housing
- ⌚ 120-277V circuit with 0-10V dimming
- ⌚ Easy installation - Quick connector and pre-wired conduit
- ⌚ Lasts 4 times longer than CFL
- ⌚ Comfortable diffused light
- ⌚ Available in 2700K, 3000K, 3500K & 4000K CCT




PRODUCT FEATURES

Accessories include a carabiner safety clip that can be used during installation for easy wiring. Two types of retaining clips are also included to secure the fixture if recessed frame does not already have pre-installed clips.

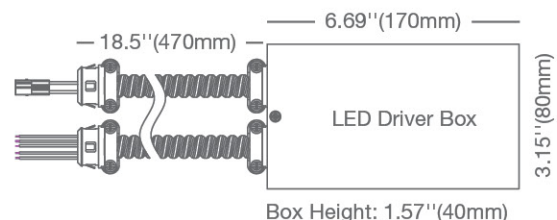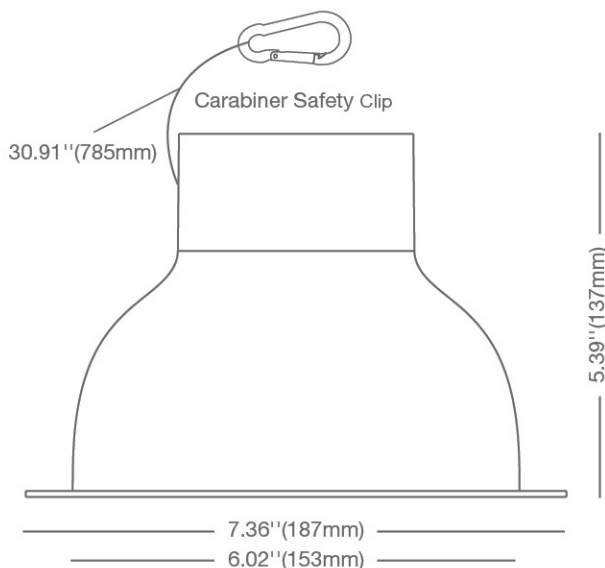


APPLICATIONS


Retail

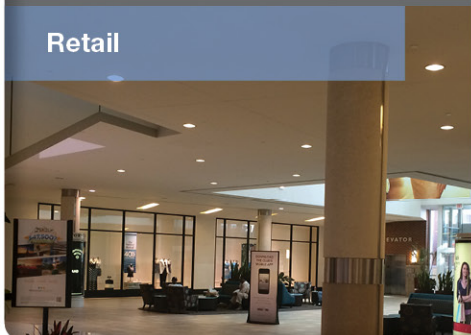

Hospitality

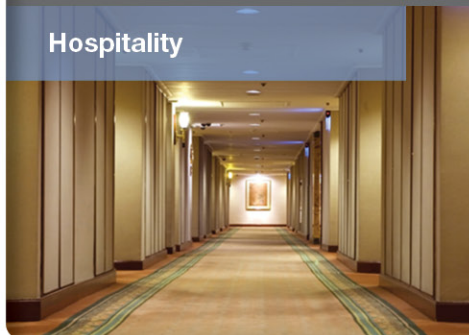

Office

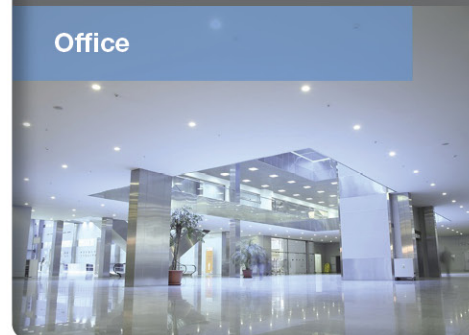

Ref.#:DS076-CDL-22W

SPECIFICATIONS*

| Product Model | 97685 22CDL6G4DIM/827/277V (MTO) | 97686 22CDL6G4DIM/830/277V | 97687 22CDL6G4DIM/835/277V | 97688 22CDL6G4DIM/840/277V |
|------------------------------------|--|-------------------------------|-------------------------------|-------------------------------|
| Type | 6" Commercial Downlight | 6" Commercial Downlight | 6" Commercial Downlight | 6" Commercial Downlight |
| Power (W) | 22 | 22 | 22 | 22 |
| Voltage - Frequency | 120-277V 50-60Hz | 120-277V 50-60Hz | 120-277V 50-60Hz | 120-277V 50-60Hz |
| Color Temp. (ANSI) | Warm White 2700K | Warm White 3000K | Neutral White 3500K | Natural White 4000K |
| CRI (Ra) (typ.) | 80 | 80 | 80 | 80 |
| Typical lumens (lm) | 1350 | 1400 | 1450 | 1500 |
| Efficacy (LPW) | 61 | 64 | 66 | 68 |
| Beam Angle | 90° | 90° | 90° | 90° |
| Dimmable | Yes | Yes | Yes | Yes |
| Power Factor | 0.9 | 0.9 | 0.9 | 0.9 |
| Rated Lifetime - L70 (hrs.) | 40,000 | 40,000 | 40,000 | 40,000 |
| Dia. x MOL | 6.02"x5.39" (153x137mm) | 6.02"x5.39" (153x137mm) | 6.02"x5.39" (153x137mm) | 6.02"x5.39" (153x137mm) |
| Trim Weight (lb. / g) | 0.78lb / 354g | 0.78lb / 354g | 0.78lb / 354g | 0.78lb / 354g |
| Driver Weight (lb. / g) | 1.74lb / 793g | 1.74lb / 793g | 1.74lb / 793g | 1.74lb / 793g |

* Specification data is preliminary and may be subject to change

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Not intended for use in enclosed fixtures

**** Full installation guide and more details available on website