

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides maintenance-free illumination for outdoor applications. Ideal illumination for walkways, yards, patios, play areas and driveways creating an inviting exterior space as well as providing safety and security.

### CONSTRUCTION

Two tool-free adjustable heads allow for easy aiming up/down or side to side. Rugged cast aluminum, corrosion-resistant housing in bronze or white. Clear acrylic lenses are fully gasketed to keep out moisture, dirt and bugs.

Each head contains (3) 5000K\* high performance LEDs which maintain 1,096 lumen output at 50,000 hour life. LED driver is 120V and operates at 60Hz.

Dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings.

\* Nominal correlated color temperature per ANSI C78-377-2008.

### INSTALLATION

Wall or eave mount.

All mounting hardware included.

### LISTINGS

UL/C-UL Certified to US and Canadian safety standards. Wet location listed.

### WARRANTY

Five-year limited warranty. Full warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

Outdoor General Purpose


# Dusk-to-Dawn LED Floodlight 2 Adjustable Heads

High Performance LED



### Dimensions

All dimensions are inches (centimeters)

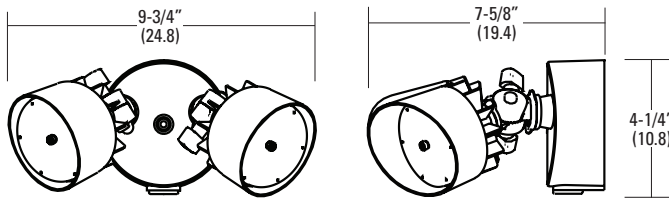

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example:** OFLR 6LC 120 P BZ

OFLR	6LC	120	P	
Series	No. of Heads	Ballast/Voltage	Features	Finish
<b>OFLR</b> LED Floodlight	<b>6LC</b> 2 heads	<b>120</b> 120V residential electronic ballast	<b>P</b> Dusk-to-dawn photocell	<b>BZ</b> Bronze <b>WH</b> White

## 2-Head LED Floodlight with Photocell

### PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

