

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides years of maintenance-free illumination for outdoor use in residential & commercial applications. Ideal for applications such as lighting walkways and stairways for safety and security.

### CONSTRUCTION

Cast-aluminum housing with corrosion-resistant paint in either dark bronze or white finish.

ADA compliant.

### OPTICS

4000K CCT LEDs.

Polycarbonate lens protects the LED from moisture, dirt and other contaminants.

**LUMEN MAINTENANCE:** The LED will deliver 70% of its initial lumens at 50,000 hour average LED life. See Lighting Facts label on page 2 for performance details.

### ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V

Operating temperature -30°C to 40°C.

1KV surge protection standard.

### INSTALLATION

Surface mounts to universal junction box (provided by others).

### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

Five-year limited warranty. Full warranty terms located at [www.AcuityBrands.com/CustomerResources/Terms\\_and\\_Conditions.aspx](http://www.AcuityBrands.com/CustomerResources/Terms_and_Conditions.aspx).

Note: Specifications are subject to change without notice.

Actual performance may differ as a result of end-user environment and application.

Catalog  
Number

Notes

Type

Outdoor General Purpose


# OLLWD & OLLWU

LED WALL CYLINDER LIGHT



### Specifications

All dimensions are inches (centimeters)

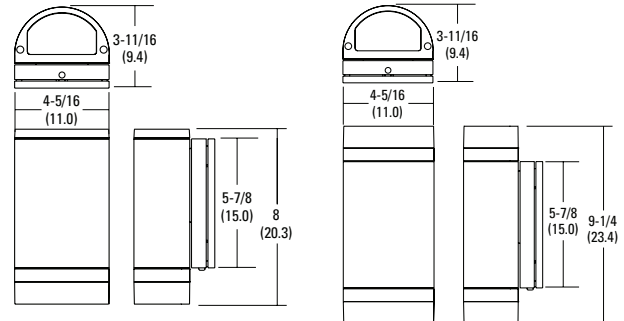

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example: OLLWD**




Series	Color temperature (CCT)	Voltage	Finish
<b>OLLWD</b> Downlight	<b>(blank)</b> 4000K	<b>(blank)</b> MVOLT (120V-277V)	<b>DDB</b> Dark bronze
<b>OLLWU</b> Up & downlight			<b>WH</b> White

# OLLWD & OLLWU LED Wall Cylinder Light




## PHOTOMETRICS

To see complete photometric reports or download .ies files for this product,visit Lithonia Lighting's Outdoor LED homepage  
 Tested in accordance with IESNA LM-79 and LM-80 standards.

## OLLWD

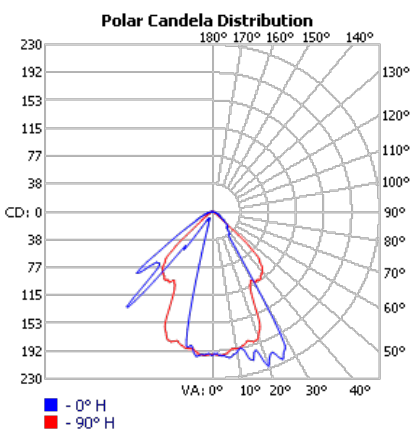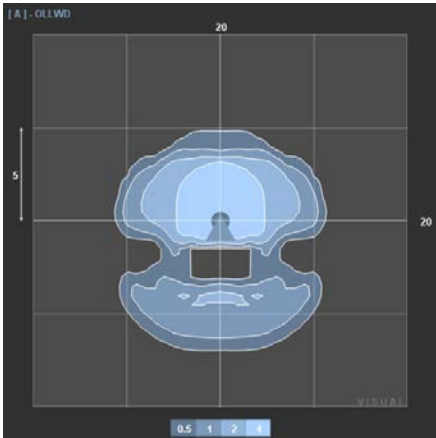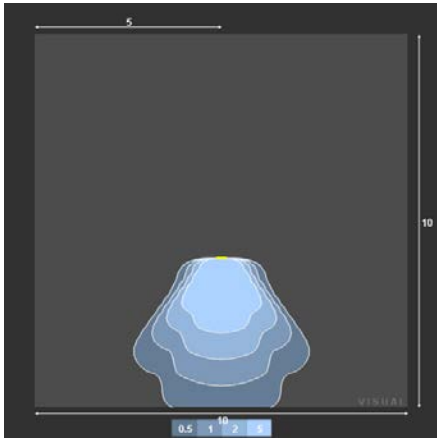

## OLLWU

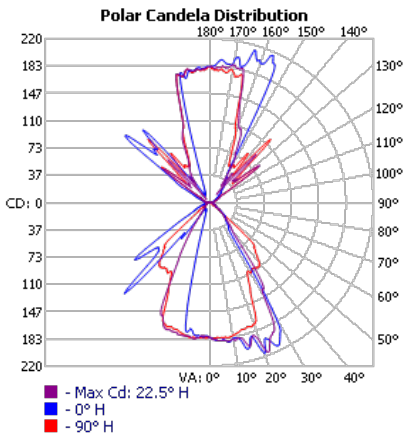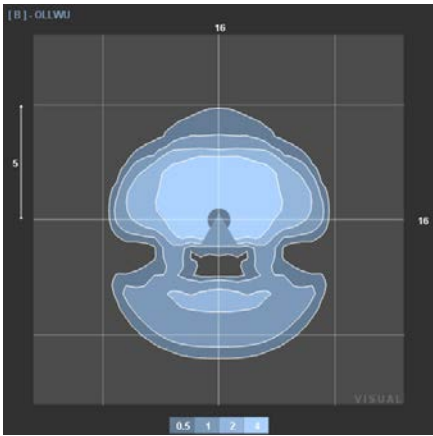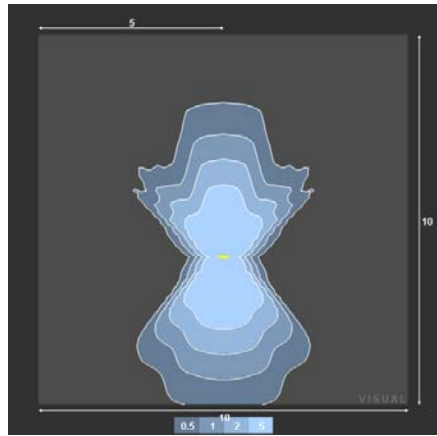

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

270

Watts

9

Lumens per Watt (Efficacy)

30

Color Accuracy

Color Rendering Index (CRI)

75

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

Warm White

Bright White

Daylight

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJ5M-4KR7Z (6/28/2012)

Model Number: OLLWD

Type: Outdoor wall-mounted porch lights

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

500

Watts

14

Lumens per Watt (Efficacy)

34

Color Accuracy

Color Rendering Index (CRI)

74

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

Warm White

Bright White

Daylight

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJ5M-4SHACV (6/25/2012)

Model Number: OLLWU

Type: Outdoor wall-mounted porch lights