



LED Wet Location Striplight

FEATURES & SPECIFICATIONS

INTENDED USE — Ideal for damp/wet locations such as outdoor venues, canopies and locker rooms. **Certain airborne contaminants can diminish integrity of polycarbonate.** [Click here for Acrylic and Polycarbonate Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Light gray, fully gasketed polycarbonate housing with stainless steel captive latches to provide a waterproof seal. 3/8" wet location fitting provided on one end.

OPTICS — UV-stabilized, high-impact, clear polycarbonate lens for maximum light output and high-impact resistance.

ELECTRICAL — High-efficiency LEDs with 84% lumen maintenance at 60,000 hours.

INSTALLATION — Mounting hardware for surface mounting to ceiling or wall (horizontally or vertically) included. Not designed for continuous row mounting or daisy chaining.

LISTINGS — UL/C-UL listed to US and Canadian Safety Standards. For use in wet locations under covered ceilings. For use in ambient temperatures from -22°F (-30°C) to 77°F (25°C). IP65 rated.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%.

Note: Specifications subject to change without notice.




Specifications

All dimensions are shown in inches (centimeters) unless otherwise noted.

LUMENS	LENGTH	WIDTH	DEPTH	WEIGHT	COMPARABLE LIGHT SOURCE
1800	47-1/2 (120.7)	2 3/8 (6.0)	3 (7.6)	4.4 lbs (2.0 kg)	1 - 32W T8

ORDERING INFORMATION

Catalog number	UPC	Description	Lumens	Wattage	Voltage	Color temperature	Pallet quantity	Standard carton quantity
XWMLLED	753573956365	LED wet location striplight	1800	24	120 - 277	4000K, 88 CRI	180	1

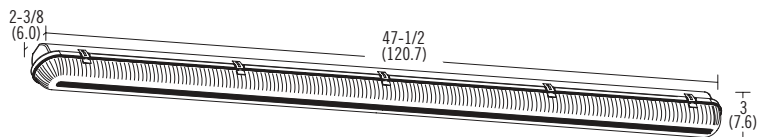

LED Wet Location Striplight

LIGHTING FACTS

Lithonia Lighting

LED
lighting facts[®]
A Program of the U.S. DOE

Light Output (Lumens)	1935
Watts	24.27
Lumens per Watt (Efficacy)	79

Color Accuracy Color Rendering Index (CRI)	87
-----------------------------------------------	----

Light Color
Correlated Color Temperature (CCT) **4297 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: 4WYJ-TZSPG1 (2/27/2013)
Model Number: XWMLED
Type: Parking garage fixture