

Grow Light

FEATURES & SPECIFICATIONS

INTENDED USE

Allows for indoor gardening year-round. Fixture includes energy-efficient T5 6500K fluorescent bulbs that produce light comparable to natural sunlight. The fixture can be chain mounted or flush mounted. Includes a 5 ft. cord-and-plug, on/off rocker switch, and a convenience outlet for linking multiple fixtures.

CONSTRUCTION

Rugged baked white enamel post painted metal housing.

Minimum operating temperature: 0°F (-18°C).

OPTICS

Clear acrylic lens directs light downward, protects the bulbs and utilizes a zip-lock design that allows for tool-free bulb replacement. Vertical sides of the lens are opaque to reduce glare.

INSTALLATION

Includes two 48 in. chains and brackets for chain-mounted installation. (Fixture may also be flush-mounted.)

Chain mounting hardware included.


LISTINGS

cUL listed to US and Canadian safety standards.

WARRANTY

Two-year limited warranty.

Note: Specifications are subject to change without notice.

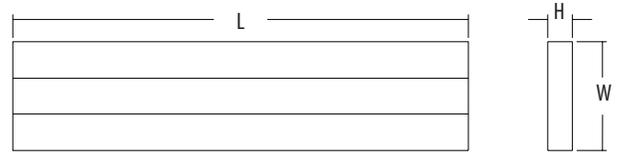

Dimensions

Length: 2' GRW - 23-1/8 (58.7)

4' GRW - 46-1/8 (117.2)

Width: 5-1/2 (14.0)

Height: 1-1/4 (3.2)

All dimensions are inches (centimeters)

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: GRW 2 14 CSW CO

Series	Number of lamps	Lamp type	Ballast/Voltage	Options
GRW Grow light	2 Two lamps	14 14W T5 6500K 28 28W T5 6500K	(blank) 120 volt residential electronic ballast (standard)	CSW 5' white cord-and-plug CO Convenience outlet

Grow Light

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.