

# OLAW23

LED AREA / WALL LIGHT

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides maintenance-free general illumination for outdoor use in residential and commercial applications such as retail, education, multi-unit housing and storage. Ideal for lighting building facades, parking areas, walkways, garages, loading areas and any other outdoor space requiring reliable safety and security.

### CONSTRUCTION

Sturdy weather-resistant aluminum housing with a bronze finish. A clear polycarbonate lens protects the optics from moisture, dirt and other contaminants.

10 high performance 5000K LEDs are powered by a 120-volt driver that uses 35 input watts and provides 2,300 delivered lumens. 50,000 hour average LED life means no lamp replacement. Fixture is maintenance-free.

Operating temperature -40°C to 40°C.

Adjustable Dusk-to-dawn, photocell standard automatically turns light on at dusk and off at dawn for convenience and energy savings.

Photocell can be disabled by rotating the photocell cover.

### INSTALLATION

Wall or arm mount (mounting arm sold separately).

All mounting hardware included.

### LISTINGS

UL Certified to US safety standards. Wet location listed.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

Five-year limited warranty.


Full warranty terms located at [www.AcuityBrands.com/CustomerResources/Terms\\_and\\_Conditions.aspx](http://www.AcuityBrands.com/CustomerResources/Terms_and_Conditions.aspx).

Note: Specifications subject to change without notice.



### Specifications

All dimensions are inches (centimeters)

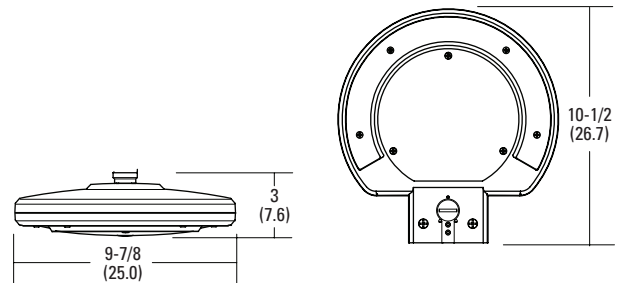

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example:** OLAW23 53K 120 PE BZ

OLAW23	53K	120	PE	BZ
Series	Color temperature	Voltage	Features	Finish
<b>OLAW23</b> LED Area / Wall Light	<b>53K</b> 5000K	<b>120</b> 120 Volt	<b>PE</b> Photocell included	<b>BZ</b> Bronze

**Accessories:** Order as separate catalog number.

OMA M6 14" Steel mounting arm

# OLAW23 LED Area / Wall Light

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.  
Tested in accordance with IESNA LM-79 and LM-80 standards.

