

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, hallways, pantries, corridors, utility areas and more.

### CONSTRUCTION

Features a white acrylic diffuser with either a pull chain or passive infrared (PIR) sensor for easy on/off operation. The PIR sensor activates when motion is detected. After 30 seconds of no motion, the fixture automatically turns off.

### OPTICS

The FMMCL produces 575 lumens (7"), 925 lumens (18"), and 1,225 lumens (24") at 50,000 hours life (see chart below).

### ELECTRICAL

Fixture operates at 120 volts, 60 Hz. Standard input wattage noted in chart below.

### INSTALLATION

All mounting hardware included. Easily installs in minutes and can be flush mounted to walls or ceilings.

### LISTINGS

cUL Certified to US and Canadian standards and listed suitable for damp locations. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

Decorative Indoor

# LED Closet Light Flush Mount



HIGH-PERFORMANCE LED



	Lumens	Wattage	LPW
<b>7"</b>	575	10.4	55
<b>18"</b>	925	14	66
<b>24"</b>	1,225	17	72

	Specifications		
	7"	18"	24"
Height:	4-1/4 (10.8)	3-1/4 (8.2)	3-1/4 (8.2)
Width:	6-5/8 (16.8)	17-6/8 (45)	23-5/8 (60)
Depth:	1-5/8 (4.1)	1-3/8 (3.6)	1-3/8 (3.6)
Weight:	.88 lb (.4 kg)	1 lb (.5 kg)	1.5 lb (.7 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMMCL 840 S1




Series <sup>1</sup>	Width	CRI/Color Tempertaure	Controls
<b>FMMCL</b> LED closet light	<b>(blank)</b> 7" <b>18</b> 18" <b>24</b> 24"	<b>840</b> 85 CRI, 4000K	<b>S1</b> Pull chain <b>PIR</b> Passive infrared sensor

### Notes

1 Use with non-dimmable switches only.

# LED Closet Light

## LIGHTING FACTS

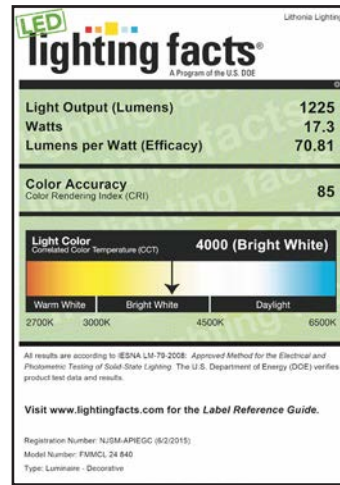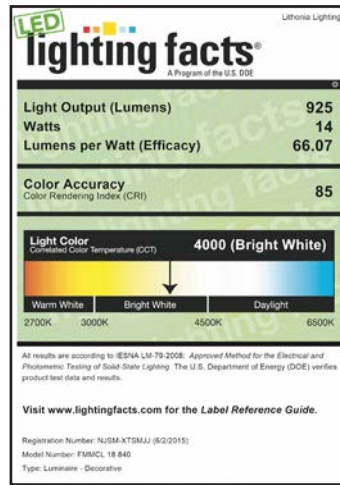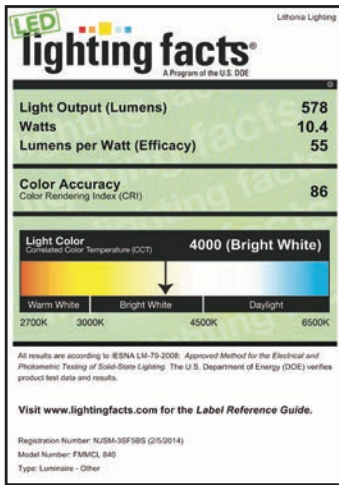

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.