Specifications

Model: 30W LED Flood Light Series

Product Code: BFL-30W-40K-120

Color: Bronze

Operating Voltage: 100-240V/AC, 50/60Hz

Customer Acknowledges：_____ Date:_____

Made by:	Atom	Verified by:	Kevin	Date :	

Picture of Real Products

Outline **Dimension（mm）**

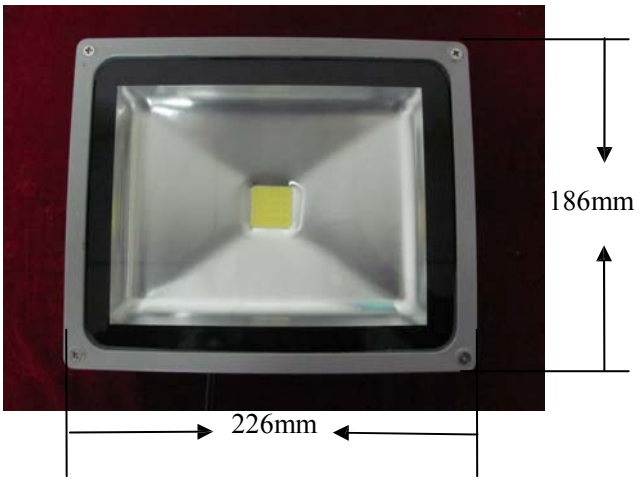

●Point Light Source Parameters

Items	**Parameters**
Power	30W
LED Quantity	1PCS Integration Bridgelux SMD LED
Color	Bronze
CCT	4000-4500K
CRI	≥75%
Life-span	≥50,000 Hours
Flux	2700±100LM
Beam Angle	120°
Material	Aluminum + Glass
Net Weight	MAX2.3KG/pcs

Gross Weight		MAX2.35KG/package
Package Dimension		240*200*150mm
Package Spec.		12PCS/ CTN(28Kg/CTN)
Master carton Dimension		A=A 490*425*480mm
●Technical Requirements		
Items	**Units**	**Parameter Range**
Working Temperature	℃	-37°C - 55°C
Working Humidity		≤95%
Storage Conditions	℃	-40℃~80℃
Rated Voltage	V	100-264VAC， 50/60Hz
Protection Level	IP 65(OUTDOOR)	

●Features:

Integrated applications of LED light source, the unique circuit control design, reached a high efficiency and energy saving of more than 80%.
Ultra-high brightness, high color-rendering index, is the latest type of indoor lighting products, long life (≥ 50,000 hours)

●Applications: Designed for factories, shopping malls ,Park, square, stage, indoor and outdoor lighting.

●Attentions: Please read the product installation manual carefully before using the products.