

Specification

Model: 10W LED Flood Light Series

Product Code: BFL-10W-40K-120

Color: Brown

Operating Voltage: 100-240VAC, 50/60Hz

Customer Acknowledges: _____


Date: _____

Made by:	Atom	Verified by:	Kevin	Date :	
----------	------	--------------	-------	--------	--

Picture of Real Products



Outline Dimension (mm)

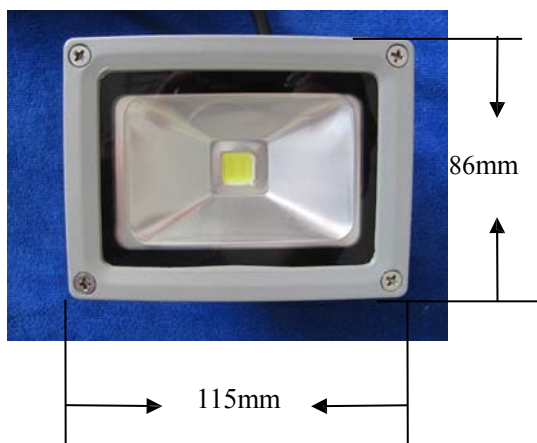

●Point Light Source Parameters

Items	Parameters
Power	10W
LED Quantity	1PCS Integration Bridgelux SMD LED
Color	Brown
CCT	4000-4500K
CRI	≥75
Life-span	≥50,000 Hours
Flux	900+/-50LM
Beam Angle	120°
Material	Aluminum+Glass
Net Weight	MAX 0.600KG/pcs
Gross Weight	MAX 0.625KG/package
Package Dimension	130*100*100mm

Package Spec.	45PCS/ CTN(29Kg/CTN)	
Master carton Dimension	510*380*310mm	
●Technical Requirements		
Items	Units	Parameter Range
Working Temperature	°C	-37°C - 55°C
Working Humidity		≤95%
Storage Conditions	°C	-40°C~80°C
Rated Voltage	V	100-264V/AC, 50/60Hz
Input Current	A	0.11-0.042
Protection Level	IP 65(OUTDOOR)	
●Features:		
<p>Integrated applications of LED light source, the unique circuit control design, reached a high efficiency and energy saving of more than 80%.</p> <p>Ultra-high brightness, high color-rendering index, is the latest type of indoor lighting products, long life (≥ 50,000 hours)</p>		
●Applications: Designed for factories, shopping malls ,Park, square, stage, indoor and outdoor lighting.		
●Attentions: Please read the product installation manual carefully before using the products.		