

LED Omni-directional A21



Ordering Information

Model No.	Item name	Lumens ² (lm)	Watts (w)	CCT ¹ (k)	Efficacy (lm/w)	CRI	Lifetime ³ (h)	Beam Angle	Base type	Voltage (v)	Weight (lb)	Cerification	Equivalent ⁴ (w)
L2-A21D-17W	A21	1600	17	2700	94	80	25000	>300°	E26	120	0.35	UL,FCC, Energy Star ⁵ Q1-2014	100
L2-A21D-16W	A21	1600	17	3000	94	80	25000	>300°	E26	120	0.35	UL,FCC, Energy Star ⁵ Q1-2014	100

3 THREE YEARS
WARRANTY




- 1. CCT Range complies to ANSI C78.377-2008.
- 2. Thermally stable typical lumens (± 10%)
- 3. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.
- 4. Equivalency based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.
- 5. Energy Star® will be available in Q1,2014.

Note: All Information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party facility.
Note: All lamps meet Energy Star® Integral LED Lamp requirements, and will be submitted for testing.

Dimensions

Model	MOL	Diameter
A21	5.12"	2.76"

Note: Lamp shape conforms to ANSI C78.21-2003.
Note: Designed to comply with RoHS Directive 2002/95/EC.

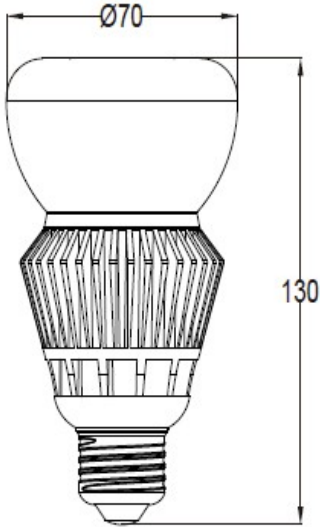

Energy Savings

Model No.	Equivalent	Energy Savings
L2-A21D-16W	100W Incandescent	\$231

*Actual Equivalent Replacement, based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.
Note: Energy Savings based on using one bulb for 25,000 hr rated life at 11¢/kWh. Does not include maintenance and replacement lamp savings.