

NEW! TCP T2 ultra-compact fluorescent SpringLamps®

- 12,000 Hours average rated life, 120Volts

Item #	Description	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Lamp Life (Hours)
4T213	★ 13 WATT T2 FULL SPRING	60	825	3.6	1.5	12,000
4T213C	13 WATT T2 FULL SPRING E12	60	825	3.5	1.5	12,000
4T213 I	13 WATT T2 FULL SPRING E17	60	825	3.5	1.5	12,000
4T223	★ 23 WATT T2 FULL SPRING	100	1600	4.4	2.0	12,000

★ ENERGY STAR®

Applications


- Accent and decorative lighting – such as chandeliers, ceiling fans, indoor/outdoor fixtures
- Ideal for applications with hard to reach areas and small fixtures

Features and Benefits

- Designed 2Fit in any small space and application
- Compact size fits more applications
- Provides more light and better lumen maintenance
- Available in all color temperatures
- End-of-life circuit design meets EURO IEC and new UL standard, 1993, 3rd Edition
- RoHS Compliant
- 23w & 13w E26 base UL approved for use in totally enclosed fixtures
- Use 13w E12 & E17 base in open recessed cans only

Specification

End of Life Protection	Yes
Ballast Type	Electronic
Input Line Voltage:	120VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	12,000 hrs
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temp	-20°F
Maximum Operating Temp	160°F
UL/cUL Listed	Yes
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Maximum Open Circuit Voltage	600V
Power Factor	>.50
Total Harmonic Distortion	<150%
Mercury	1.5 mg

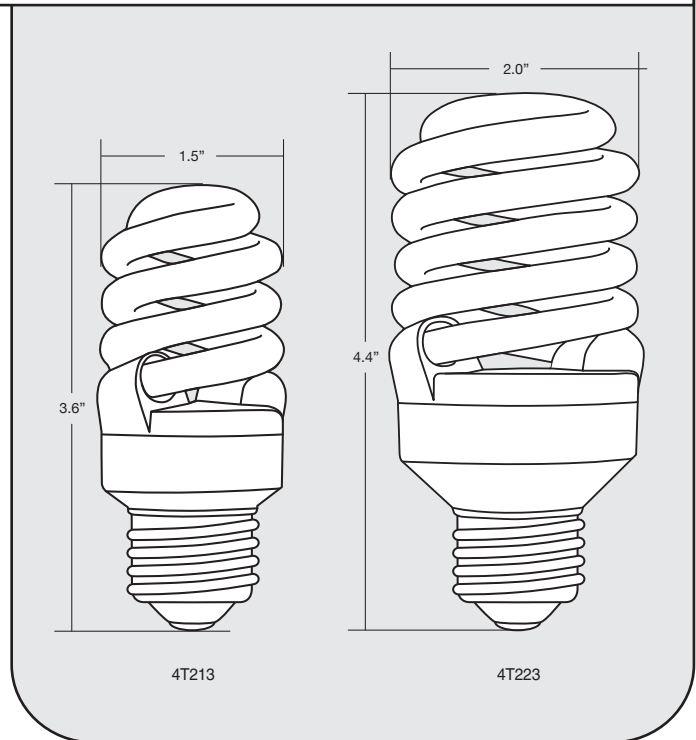

Perfect for most applications:

- + Table Lamps
- + Floor Lamps
- + Ceiling Fixtures
- + Wall Sconces
- + Vanities
- + Recessed Cans
- + Track Lighting



24 MONTH WARRANTY