

# GE 1 5/8" T8 Mod-U-Line

## F31T8/U


- Now available in 31 watts (F31T8/U)
- Color Rendering Index (CRI) 82
- 1 5/8" leg spacing
- 20,000 hour life
- Available in 3,000K, 3,500K and 4100K

### Applications:


- Retail
- Commercial
- Schools
- Health Care
- General Office




(A) MOL (In.)	(B) Max. Base Face to Top of Lamp (In.)	(C) Base Center to Base Center (In.)	(D) Max. Tube Diameter (In.)
23	22.6	1.625	1.1

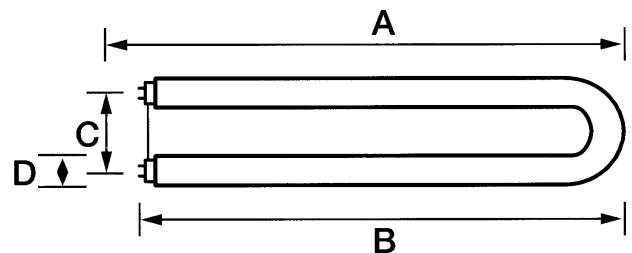

### Lamp Mortality

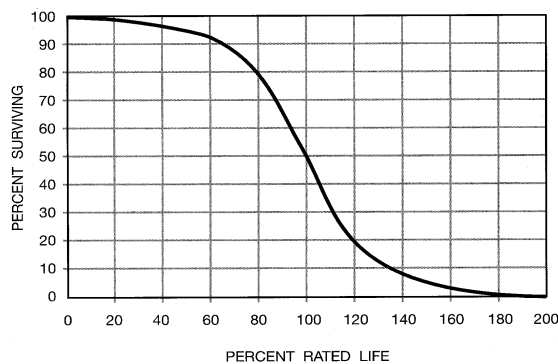

### Lumen Maintenance

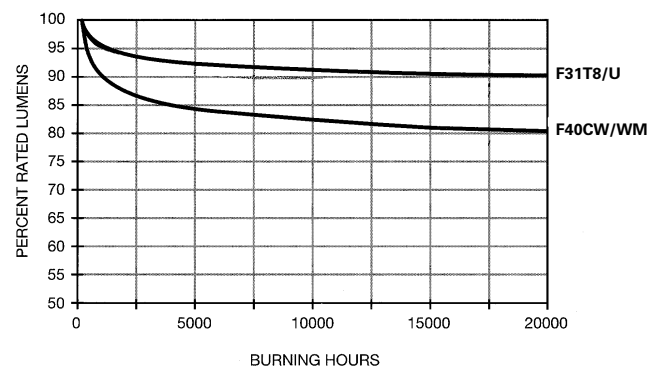

Watts	Product Code	Lamp Description	Initial Lumens	Mean Lumens	Life (Hrs)*	Color Temp. K	CRI
31	41776	F31T8/U/SPX30	2725	2510	20,000	3000K	82
31	41777	F31T8/U/SPX35	2725	2510	20,000	3500K	82
31	41778	F31T8/U/SPX41	2725	2510	20,000	4100K	82

\*Based on 3 hours per start on magnetic rapid start reference ballast.

For complete product information, visit the GE website at [www.GELighting.com](http://www.GELighting.com)



**GE Lighting**