



Deco Series Lamp Specifications

SpringLamp® Compact Fluorescent, NPF

8,000 Hours average rated life

Applications:

Ideal for decorative fixtures.

Replaces Incandescent for:

- + Decorative Fixtures
- + Enclosed Outdoor Fixtures
- + Sconces




Special Application Options: (Ordering Suffix)

- 3100K (31K)
- 3500K (35K)
- 4100K (41K)
- 5100K (51K)
- 6500K (65K)

Features and Benefits

- Long life CFL, 8,000 hour average rated life
- Amalgam technology- provides cooler operating temperatures for consistent performance in any position
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base or candelabra base available
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations - use indoors or outdoors
- Quickstart technology - fast run up time

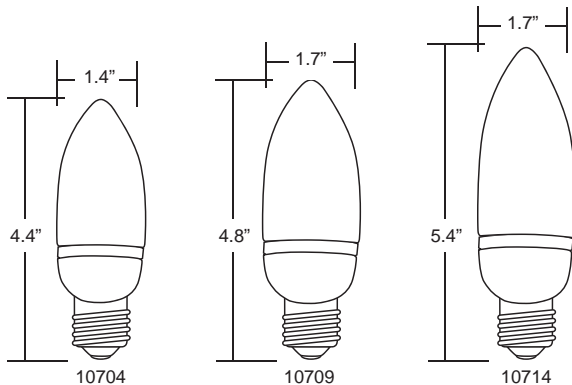

Catalog Number

Notes

Type



Specifications (at full brightness)

| | |
|-------------------------------------|----------------------|
| End of Life Protection..... | Yes |
| Ballast Type | Electronic |
| Starting Method..... | Modified Rapid Start |
| Input Line Voltage | 120VAC |
| Input Line Frequency | 50/60HZ |
| Lamp Life (rated) | 8,000 Hours |
| Color Temperature | 2700°K |
| Color Rendering Index | 82 |
| Minimum Starting Temperature | -20°F, -29°C |
| Maximum Operating Temperature | 160°F, 71°C |
| U.L. / C.U.L. Listed | Yes – E149698 |
| FCC Compliance | Part 18, Subpart C |
| Lamp Operating Frequency | 45 KHZ |
| Max. Open Circuit Voltage | 600V |
| Lamp Current Crest Factor | <1.60 |
| Total Harmonic Distortion | <33% |
| High Power Factor Rated | >.90 |

Special Application Notes

- UL approved for wet location in Base Up position only. Base Up position is defined as screw base in a 12:00 position. Any other base position must be in a UL approved weatherproof fixture.

| Warranties and Certifications: | Item # | Description | Wattage | Incandescent Wattage Comparison | Initial Lumens | Input Line Current | M.O.L. (inches) | Diameter (inches) | Base Type | Life vs. Incandescent |
|--|----------|------------------|---------|---------------------------------|----------------|--------------------|-----------------|-------------------|-----------|-----------------------|
| 12 MONTH WARRANTY For the most up-to-date specs, please visit www.tcp.com | ★ 10704 | Deco, Medium | 4 | 15 | 195 | .07A | 4.4 | 1.4 | E26 | 5X |
| | ★ 10704C | Deco, Candelabra | 4 | 15 | 195 | .07A | 4.4 | 1.4 | E12 | 5X |
| | ★ 10709 | Deco, Medium | 9 | 40 | 425 | .16A | 4.8 | 1.7 | E26 | 5X |
| | ★ 10709C | Deco, Candelabra | 9 | 40 | 425 | .16A | 4.8 | 1.7 | E12 | 5X |
| | ★ 10714 | Deco, Medium | 14 | 60 | 720 | .20A | 5.4 | 1.7 | E26 | 5X |
| | ★ 10714C | Deco, Candelabra | 14 | 60 | 720 | .20A | 5.4 | 1.7 | E12 | 5X |

★ ENERGY STAR®

