


USHIO

CHARACTERISTICS & SPECIFICATIONS

ULTRALINE™ MR-16 LAMPS









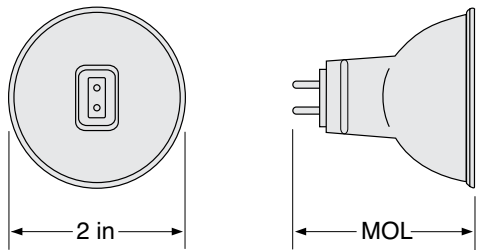


GU5.3



LAMP SOCKET

The model C-33U socket is rated up to 24V-7A for use with all low voltage USHIO GU5.3 based MR-16 lamps. The metal clips secure the lamp firmly into the socket. Use Ordering Code 1002142



Watts (W)	Ushio Ordering Code	Ushio Lamp Code	Voltage (V)	Color Temp (K)	Beam Angle	Beam Spread	Luminous Intensity (cd)	Avg Life (h)	Burn Position
20	1003413	BBF/FG/ULTRA	12	3000	24°	Narrow Flood	880	10,000	Universal
20	1003412	BAB/FG/ULTRA	12	3000	36°	Flood	450	10,000	Universal
35	1002236	FMV/FG/ULTRA	12	3000	24°	Narrow Flood	1700	10,000	Universal
35	1002237	FMW/FG/ULTRA	12	3000	36°	Flood	950	10,000	Universal
35	1003342	FMW/60/FG/ULTRA	12	3000	60°	Wide Flood	370	10,000	Universal
50	1002168	EXT/FG/ULTRA	12	3100	12°	Spot	8600	10,000	Universal
50	1002114	EXZ/FG/ULTRA	12	3100	24°	Narrow Flood	2700	10,000	Universal
50	1000410	EXN/FG/ULTRA	12	3100	36°	Flood	1500	10,000	Universal
50	1003343	FNV/60/FG/ULTRA	12	3100	60°	Wide Flood	620	10,000	Universal



Ultraline™ lamps are manufactured under ISO 9001 guidelines ensuring quality and security for the purchaser

Distributed by:

Form No. S-MR16UL/R-0207: The specifications on this sheet supercede all previously published specifications and may be subject to change for design and specification improvement without prior notice.